

**Features**

- 3000 MHz operation
- $\div 10/11$  dual modulus prescaler
- Internal phase detector
- Serial, parallel or hardwired programmable
- Ultra-low phase noise
- SEU <  $10^{-9}$  errors / bit-day
- 100 kRad(Si) total dose
- 44-lead CQFJ


**Product Description**



Peregrine’s PE9702 is a high-performance integer-N PLL capable of frequency synthesis up to 3000 MHz. The device is designed for superior phase noise performance while providing an order of magnitude reduction in current consumption, when compared with existing commercial space PLLs.

The PE9702 features a 10/11 dual modulus prescaler, counters and a phase comparator as shown in *Figure 1*. Counter values are programmable through either a serial or parallel interface and can also be directly hard wired.

The PE9702 is optimized for commercial space applications. Single event latchup (SEL) is physically impossible and single event upset (SEU) is better than  $10^{-9}$  errors per bit / day. It is manufactured on Peregrine’s UltraCMOS® process, a patented variation of silicon-on-insulator (SOI) technology on a sapphire substrate, offering excellent RF performance and intrinsic radiation tolerance.

**Figure 1. Block Diagram**

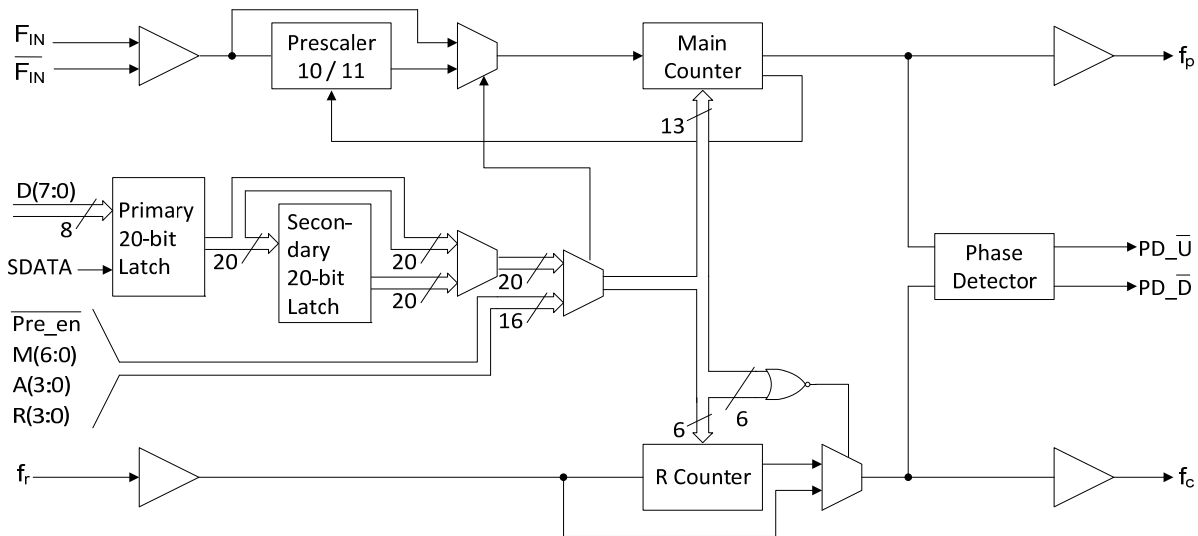

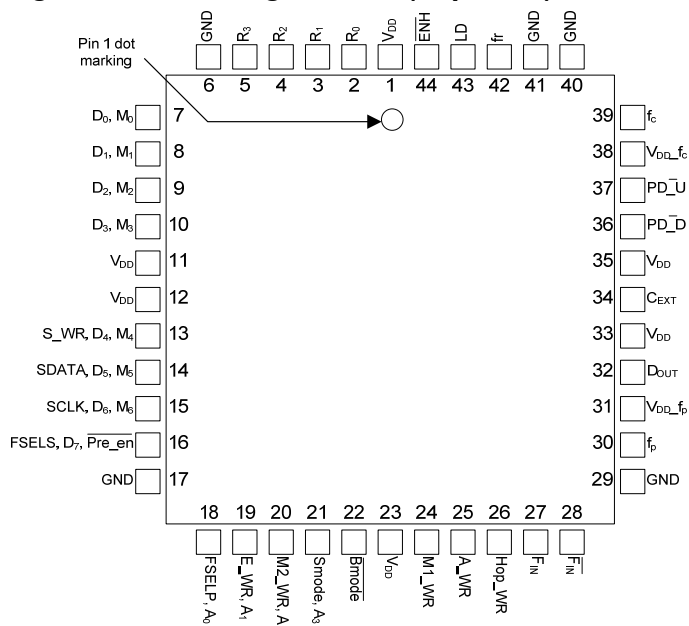**Figure 2. Pin Configurations (Top View)**

**Figure 3. Package Type**  
44-lead CQFJ

**Table 1. Pin Descriptions**

Pin No.	Pin Name	Interface Mode	Type	Description
1	V <sub>DD</sub>	ALL	Note 1	Power supply input. Input may range from 2.85V to 3.15V. Bypassing recommended.
2	R <sub>0</sub>	Direct	Input	R counter bit 0 (LSB).
3	R <sub>1</sub>	Direct	Input	R counter bit 1.
4	R <sub>2</sub>	Direct	Input	R counter bit 2.
5	R <sub>3</sub>	Direct	Input	R counter bit 3.
6	GND	ALL	Note 1	Ground.
7	D <sub>0</sub>	Parallel	Input	Parallel data bus bit 0 (LSB).
	M <sub>0</sub>	Direct	Input	M counter bit 0 (LSB).
8	D <sub>1</sub>	Parallel	Input	Parallel data bus bit 1.
	M <sub>1</sub>	Direct	Input	M counter bit 1.
9	D <sub>2</sub>	Parallel	Input	Parallel data bus bit 2.
	M <sub>2</sub>	Direct	Input	M counter bit 2.
10	D <sub>3</sub>	Parallel	Input	Parallel data bus bit 3.
	M <sub>3</sub>	Direct	Input	M counter bit 3.
11	V <sub>DD</sub>	ALL	Note 1	Same as pin 1.
12	V <sub>DD</sub>	ALL	Note 1	Same as pin 1.
13	S_WR	Serial	Input	Serial load enable input. While S_WR is "low", SDATA can be serially clocked. Primary register data is transferred to the secondary register on S_WR or Hop_WR rising edge.
	D <sub>4</sub>	Parallel	Input	Parallel data bus bit 4.
	M <sub>4</sub>	Direct	Input	M counter bit 4.

**Table 1. Pin Descriptions (continued)**

Pin No.	Pin Name	Interface Mode	Type	Description
14	SDATA	Serial	Input	Binary serial data input. Input data entered MSB first.
	D <sub>5</sub>	Parallel	Input	Parallel data bus bit 5.
	M <sub>5</sub>	Direct	Input	M counter bit 5.
15	SCLK	Serial	Input	Serial clock input. SDATA is clocked serially into the 20-bit primary register (E_WR “low”) or the 8-bit enhancement register (E_WR “high”) on the rising edge of SCLK.
	D <sub>6</sub>	Parallel	Input	Parallel data bus bit 6.
	M <sub>6</sub>	Direct	Input	M counter bit 6.
16	FSELS	Serial	Input	Selects contents of primary register (FSELS=1) or secondary register (FSELS=0) for programming of internal counters while in Serial Interface mode.
	D <sub>7</sub>	Parallel	Input	Parallel data bus bit 7 (MSB).
	Pre_en	Direct	Input	Prescaler enable, active “low”. When “high”, F <sub>IN</sub> bypasses the prescaler.
17	GND	ALL		Ground.
18	FSELP	Parallel	Input	Selects contents of primary register (FSELP=1) or secondary register (FSELP=0) for programming of internal counters while in Parallel Interface mode.
	A <sub>0</sub>	Direct	Input	A counter bit0 (LSB).
19	E_WR	Serial	Input	Enhancement register write enable. While E_WR is “high”, SDATA can be serially clocked into the enhancement register on the rising edge of SCLK.
		Parallel	Input	Enhancement register write. D[7:0] are latched into the enhancement register on the rising edge of E_WR.
	A <sub>1</sub>	Direct	Input	A counter bit 1.
20	M2_WR	Parallel	Input	M2 write. D[3:0] are latched into the primary register (R[5:4], M[8:7]) on the rising edge of M2_WR.
	A <sub>2</sub>	Direct	Input	A counter bit 2.
21	Smode	Serial, Parallel	Input	Selects serial bus interface mode ( $\overline{\text{Bmode}}=0$ , Smode=1) or Parallel Interface Mode ( $\overline{\text{Bmode}}=0$ , Smode=0).
	A <sub>3</sub>	Direct	Input	A counter bit 3 (MSB).
22	$\overline{\text{Bmode}}$	ALL	Input	Selects direct interface mode ( $\overline{\text{Bmode}}=1$ ).
23	V <sub>DD</sub>	ALL	Note 1	Same as pin 1.
24	M1_WR	Parallel	Input	M1 write. D[7:0] are latched into the primary register ( $\overline{\text{Pre\_en}}$ , M[6:0]) on the rising edge of M1_WR.
25	A_WR	Parallel	Input	A write. D[7:0] are latched into the primary register (R[3:0], A[3:0]) on the rising edge of A_WR.
26	Hop_WR	Serial, Parallel	Input	Hop write. The contents of the primary register are latched into the secondary register on the rising edge of Hop_WR.
27	F <sub>IN</sub>	ALL	Input	Prescaler input from the VCO. 3.0 GHz max frequency.
28	$\overline{\text{F}}_{\text{IN}}$	ALL	Input	Prescaler complementary input. A bypass capacitor in series with a 51Ω resistor should be placed as close as possible to this pin and be connected directly to the ground plane.
29	GND	ALL		Ground.
30	f <sub>p</sub>	ALL	Output	Monitor pin for main divider output. Switching activity can be disabled through enhancement register programming or by floating or grounding V <sub>DD</sub> pin 31.

**Table 1. Pin Descriptions (continued)**

Pin No.	Pin Name	Interface Mode	Type	Description
31	V <sub>DD-f<sub>p</sub></sub>	ALL	Note 1	V <sub>DD</sub> for f <sub>p</sub> . Can be left floating or connected to GND to disable the f <sub>p</sub> output.
32	D <sub>OUT</sub>	Serial, Parallel	Output	Data Out. The MSEL signal and the raw prescaler output are available on D <sub>OUT</sub> through enhancement register programming.
33	V <sub>DD</sub>	ALL	Note 1	Same as pin 1.
34	C <sub>EXT</sub>	ALL	Output	Logical "NAND" of PD <sub>U</sub> and PD <sub>D</sub> terminated through an on chip, 2 kΩ series resistor. Connecting C <sub>EXT</sub> to an external capacitor will low pass filter the input to the inverting amplifier used for driving LD.
35	V <sub>DD</sub>	ALL	Note 1	Same as pin 1.
36	PD <sub>D</sub>	ALL	Output	PD <sub>D</sub> is pulse down when f <sub>p</sub> leads f <sub>c</sub> .
37	PD <sub>U</sub>	ALL		PD <sub>U</sub> is pulse down when f <sub>c</sub> leads f <sub>p</sub> .
38	V <sub>DD-f<sub>c</sub></sub>	ALL	Note 1	V <sub>DD</sub> for f <sub>c</sub> . Can be left floating or connected to GND to disable the f <sub>c</sub> output.
39	f <sub>c</sub>	ALL	Output	Monitor pin for reference divider output. Switching activity can be disabled through enhancement register programming or by floating or grounding V <sub>DD</sub> pin 38.
40	GND	ALL		Ground.
41	GND	ALL		Ground.
42	f <sub>r</sub>	ALL	Input	Reference frequency input.
43	LD	ALL	Output, OD	Lock detect and open drain logical inversion of C <sub>EXT</sub> . When the loop is in lock, LD is high impedance, otherwise LD is a logic low ("0").
44	ENH	Serial, Parallel	Input	Enhancement mode. When asserted low ("0"), enhancement register bits are functional.

- Notes:
1. V<sub>DD</sub> pins 1, 11, 12, 23, 31, 33, 35 and 38 are connected by diodes and must be supplied with the same positive voltage level. V<sub>DD</sub> pins 31 and 38 are used to enable test modes and should be left floating.
  2. All digital input pins have 70 kΩ pull-down resistors to ground.

**Table 2. Absolute Maximum Ratings**

Symbol	Parameter/Condition	Min	Max	Unit
$V_{DD}$	Supply voltage	-0.3	4.0	V
$V_I$	Voltage on any input	-0.3	$V_{DD} + 0.3$	V
$I_I$	DC into any input	-10	+10	mA
$I_O$	DC into any output	-10	+10	mA
$T_{STG}$	Storage temperature range	-65	150	°C

**Table 3. Operating Ratings**

Symbol	Parameter/Condition	Min	Max	Unit
$V_{DD}$	Supply voltage	2.85	3.15	V
$T_A$	Operating ambient temperature range	-40	85	°C

Exceeding absolute maximum ratings may cause permanent damage. Operation should be restricted to the limits in the Operating Ranges table. Operation between operating range maximum and absolute maximum for extended periods may reduce reliability.

**Table 4. ESD Ratings**

Symbol	Parameter/Condition	Level	Unit
$V_{ESD}$	ESD voltage (Human Body Model)*	1000	V

Note: \* Periodically sampled, not 100% tested. Tested per MIL-STD-883, M3015 C2.

### Electrostatic Discharge (ESD) Precautions

When handling this UltraCMOS device, observe the same precautions that you would use with other ESD-sensitive devices. Although this device contains circuitry to protect it from damage due to ESD, precautions should be taken to avoid exceeding the specified rating in *Table 4*.

### Latch-Up Immunity

Unlike conventional CMOS devices, UltraCMOS devices are immune to latch-up.

### ELDRS

UltraCMOS devices do not include bipolar minority carrier elements and therefore do not exhibit enhanced low dose rate sensitivity.

**Table 5. DC Characteristics:  $V_{DD} = 3.0V$ ,  $-40\text{ }^{\circ}C < T_A < +85\text{ }^{\circ}C$ , unless otherwise specified**

Symbol	Parameter	Condition	Min	Typ	Max	Unit
$I_{DD}$	Operational supply current;	$V_{DD} = 2.85$ to $3.15V$		10	31	mA
	Prescaler disabled					
	Prescaler enabled			24		mA
<b>Digital inputs: all except <math>f_r</math>, <math>F_{IN}</math>, <math>\overline{F_{IN}}</math></b>						
$V_{IH}$	High level input voltage	$V_{DD} = 2.85$ to $3.15V$	$0.7 \times V_{DD}$			V
$V_{IL}$	Low level input voltage	$V_{DD} = 2.85$ to $3.15V$			$0.3 \times V_{DD}$	V
$I_{IH}$	High level input current	$V_{IH} = V_{DD} = 3.15V$			+70	$\mu A$
$I_{IL}$	Low level input current	$V_{IL} = 0$ , $V_{DD} = 3.15V$	-1			$\mu A$
<b>Reference divider input: <math>f_r</math></b>						
$I_{IHR}$	High level input current	$V_{IH} = V_{DD} = 3.15V$			+100	$\mu A$
$I_{ILR}$	Low level input current	$V_{IL} = 0$ , $V_{DD} = 3.15V$	-100			$\mu A$
<b>R0 input: <math>R_0</math></b>						
$I_{IHR}$	High level input current	$V_{IH} = V_{DD} = 3.15V$			+70	$\mu A$
$I_{ILR}$	Low level input current	$V_{IL} = 0$ , $V_{DD} = 3.15V$	-5			$\mu A$
<b>Counter and phase detector outputs: <math>f_c</math>, <math>f_p</math></b>						
$V_{OLD}$	Output voltage LOW	$I_{out} = 6\text{ mA}$			0.4	V
$V_{OHD}$	Output voltage HIGH	$I_{out} = -3\text{ mA}$	$V_{DD} - 0.4$			V
<b>Lock detect outputs: <math>C_{EXT}</math>, LD</b>						
$V_{OLC}$	Output voltage LOW, $C_{EXT}$	$I_{out} = 100\text{ }\mu A$			0.4	V
$V_{OHC}$	Output voltage HIGH, $C_{EXT}$	$I_{out} = -100\text{ }\mu A$	$V_{DD} - 0.4$			V
$V_{OLLD}$	Output voltage LOW, LD	$I_{out} = 6\text{ mA}$			0.4	V

**Table 6. AC Characteristics:  $V_{DD} = 3.0\text{ V}$ ,  $-40\text{ }^{\circ}\text{C} < T_A < +85\text{ }^{\circ}\text{C}$ , unless otherwise specified**

Symbol	Parameter	Condition	Min	Max	Unit
<b>Control interface and latches (see Figures 4–6)</b>					
$f_{\text{Clk}}$	Serial data clock frequency	(Note 1)		10	MHz
$t_{\text{ClkH}}$	Serial clock HIGH time		30		ns
$t_{\text{ClkL}}$	Serial clock LOW time		30		ns
$t_{\text{DSU}}$	SDATA set-up time after SCLK rising edge, D[7:0] set-up time to M1_WR, M2_WR, A_WR, E_WR rising edge		10		ns
$t_{\text{DHLD}}$	SDATA hold time after SCLK rising edge, D[7:0] hold time to M1_WR, M2_WR, A_WR, E_WR rising edge		10		ns
$t_{\text{PW}}$	S_WR, M1_WR, M2_WR, A_WR, E_WR pulse width		30		ns
$t_{\text{CWR}}$	SCLK rising edge to S_WR rising edge. S_WR, M1_WR, M2_WR, A_WR falling edge to Hop_WR rising edge		30		ns
$t_{\text{CE}}$	SCLK falling edge to E_WR transition		30		ns
$t_{\text{WRC}}$	S_WR falling edge to SCLK rising edge. Hop_WR falling edge to S_WR, M1_WR, M2_WR, A_WR rising edge		30		ns
$t_{\text{EC}}$	E_WR transition to SCLK rising edge		30		ns
$t_{\text{MDO}}$	MSEL data out delay after $F_{\text{IN}}$ rising edge	$C_L = 12\text{ pf}$		8	ns
<b>Main divider (including prescaler)</b>					
$F_{\text{IN}}$	Operating frequency		500	3000	MHz
$P_{F_{\text{IN}}}$	Input level range	External AC coupling	-5	5	dBm
<b>Main divider (prescaler bypassed)</b>					
$F_{\text{IN}}$	Operating frequency		50	300	MHz
$P_{F_{\text{IN}}}$	Input level range	External AC coupling	-5	5	dBm
<b>Reference divider</b>					
$f_r$	Operating frequency	(Note 3)		100	MHz
$P_{f_r}$	Reference input power (Note 2)	Single-ended input	-2		dBm
<b>Phase Detector</b>					
$f_c$	Comparison frequency	(Note 3)		20	MHz


- Notes: 1.  $f_{\text{clk}}$  is verified during the functional pattern test. Serial programming sections of the functional pattern are clocked at 10 MHz to verify  $f_{\text{clk}}$  specification.  
2. CMOS logic levels can be used to drive reference input if DC coupled. Voltage input needs to be a minimum of 0.5  $V_{p-p}$ .  
3. Parameter is guaranteed through characterization only and is not tested.

### Functional Description

The PE9702 consists of a prescaler, counters, a phase detector, and control logic. The dual modulus prescaler divides the VCO frequency by either 10 or 11, depending on the value of the modulus select. Counters “R” and “M” divide the reference and prescaler output, respectively, by integer values stored in a 20-bit register. An additional counter (“A”) is used in the modulus select logic. The phase-frequency detector

generates up and down frequency control signals. The control logic includes a selectable chip interface. Data can be written via serial bus, parallel bus, or hardwired directly to the pins. There are also various operational and test modes and a lock detect output.

Figure 4. Functional Block Diagram

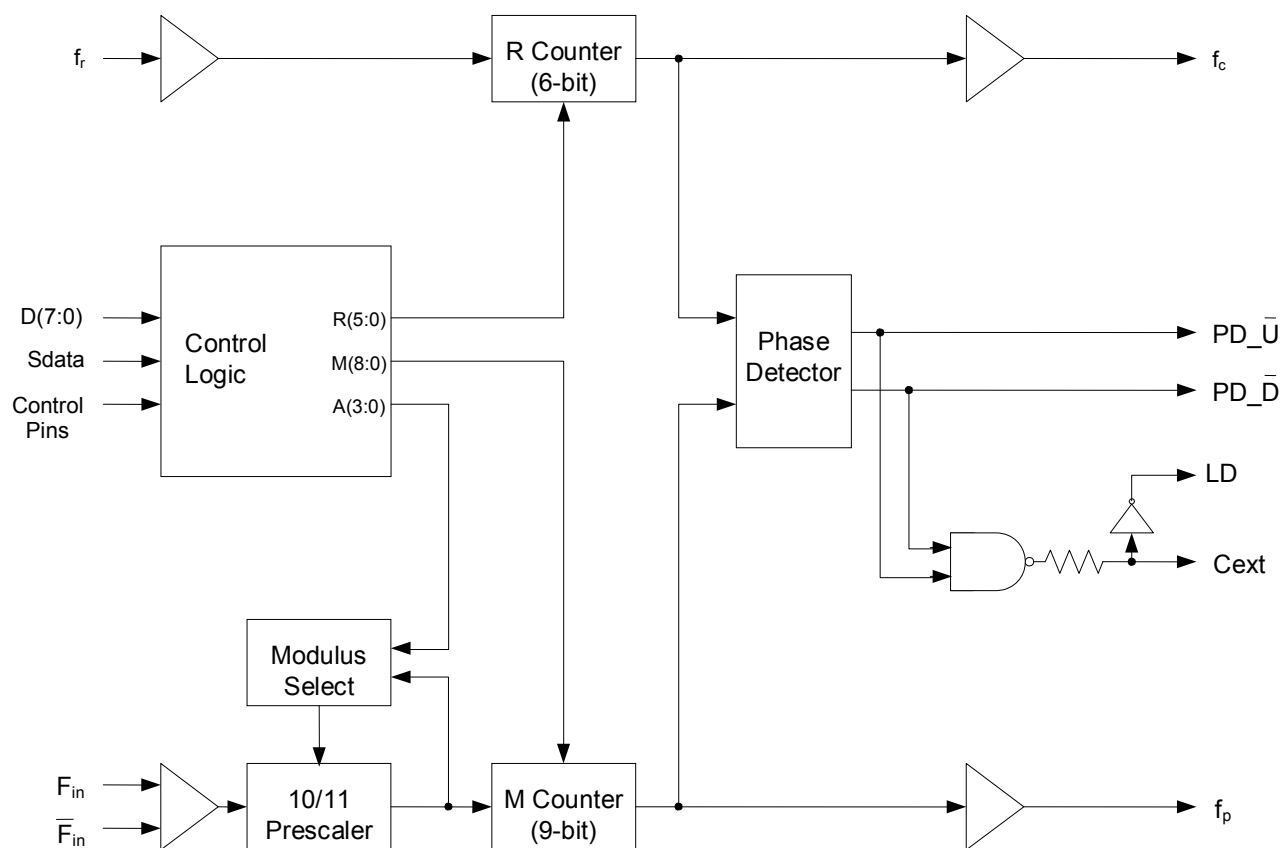



## Main Counter Chain

### Normal Operating Mode

The main counter chain divides the RF input frequency,  $F_{IN}$ , by an integer derived from the user-defined values in the “M” and “A” counters. It is composed of the 10/11 dual modulus prescaler, modulus select logic, and 9-bit M counter. Setting  $\overline{\text{Pre\_en}}$  “low” enables the 10/11 prescaler. Setting  $\overline{\text{Pre\_en}}$  “high” allows  $F_{IN}$  to bypass the prescaler and powers down the prescaler.

The output from the main counter chain,  $f_p$ , is related to the VCO frequency,  $F_{IN}$ , by the following equation:

$$f_p = F_{IN} / [10 \times (M+1) + A] \quad (1)$$

where  $A \leq M + 1$ ,  $1 \leq M \leq 511$

When the loop is locked,  $F_{IN}$  is related to the reference frequency,  $F_R$ , by the following equation:

$$F_{IN} = [10 \times (M+1) + A] \times [F_R / (R+1)] \quad (2)$$

where  $A \leq M + 1$ ,  $1 \leq M \leq 511$

A consequence of the upper limit on A is that  $F_{IN}$  must be greater than or equal to  $90 \times [F_R / (R+1)]$  to obtain contiguous channels. Programming the M counter with the minimum value of “1” will result in a minimum M counter divide ratio of “2”.

In Direct Interface mode, main counter inputs  $M_7$  and  $M_8$  are internally forced low. In this mode, the M value is limited to  $1 \leq M \leq 127$ .

### Prescaler Bypass Mode

Setting  $\overline{\text{Pre\_en}}$  “high” allows  $F_{IN}$  to bypass and power down the prescaler. In this mode, the 10/11 prescaler and A register are not active, and the input VCO frequency is divided by the M counter directly. The following equation relates  $F_{IN}$  to the reference frequency,  $F_R$ :

$$F_{IN} = (M+1) \times [f_r / (R+1)] \quad (3)$$

where  $1 \leq M \leq 511$

In Direct Interface mode, main counter inputs  $M_7$  and  $M_8$  are internally forced low. In this mode, the M value is limited to  $1 \leq M \leq 127$ .

## Reference Counter

The reference counter chain divides the reference frequency,  $F_R$ , down to the phase detector comparison frequency,  $f_c$ .

The output frequency of the 6-bit R counter is related to the reference frequency by the following equation:

$$f_c = F_R / (R+1) \quad (4)$$

where  $0 \leq R \leq 63$

Note that programming R with “0” will pass the reference frequency,  $F_R$ , directly to the phase detector.

In Direct Interface mode, R counter inputs  $R_4$  and  $R_5$  are internally forced low (“0”). In this mode, the R value is limited to  $0 \leq R \leq 15$ .

## Register Programming

### Parallel Interface Mode

Parallel Interface Mode is selected by setting the  $\overline{\text{Bmode}}$  input “low” and the  $\overline{\text{Smode}}$  input “low”.

Parallel input data,  $D[7:0]$ , are latched in a parallel fashion into one of three 8-bit primary register sections on the rising edge of  $M1\_WR$ ,  $M2\_WR$ , or  $A\_WR$  per the mapping shown in *Table 7*. The contents of the primary register are transferred into a secondary register on the rising edge of  $\text{Hop\_WR}$  according to the timing diagram shown in *Figure 6*. Data is transferred to the counters as shown in *Table 7*.

The secondary register acts as a buffer to allow rapid changes to the VCO frequency. This double buffering for “ping-pong” counter control is programmed via the  $\overline{\text{FSELP}}$  input. When  $\overline{\text{FSELP}}$  is “high”, the primary register contents set the counter inputs. When  $\overline{\text{FSELP}}$  is “low”, the secondary register contents are utilized.

Parallel input data,  $D[7:0]$ , are latched into the enhancement register on the rising edge of  $\overline{\text{E\_WR}}$  according to the timing diagram shown in *Figure 5*. This data provides control bits as shown in *Table 8* with bit functionality enabled by asserting the  $\overline{\text{ENH}}$  input “low”.

### Serial Interface Mode

Serial Interface mode is selected by setting the  $\overline{\text{Bmode}}$  input “low” and the  $\text{Smode}$  input “high”.

While the  $\text{E\_WR}$  input is “low” and the  $\text{S\_WR}$  input is “low”, serial input data (SDATA input),  $\text{B}_0$  to  $\text{B}_{19}$ , is clocked serially into the primary register on the rising edge of  $\text{SCLK}$ , MSB ( $\text{B}_0$ ) first. The contents from the primary register are transferred into the secondary register on the rising edge of either  $\text{S\_WR}$  or  $\text{Hop\_WR}$  according to the timing diagram shown in *Figure 6*. Data is transferred to the counters as shown in *Table 7*.

The double buffering provided by the primary and secondary registers allows for “ping-pong” counter control using the  $\text{FSELS}$  input. When  $\text{FSELS}$  is “high”, the primary register contents set the counter inputs. When  $\text{FSELS}$  is “low”, the secondary register contents are utilized.

While the  $\text{E\_WR}$  input is “high” and the  $\text{S\_WR}$  input is “low”, serial input data (SDTA input),  $\text{B}_0$  to  $\text{B}_7$ , is clocked serially into the enhancement register on the rising edge of  $\text{SCLK}$ , MSB ( $\text{B}_0$ ) first. The enhancement register is double buffered to prevent inadvertent control changes during serial loading, with buffer capture of the serially-entered data performed on the falling edge of  $\text{E\_WR}$  according to the timing diagram shown in *Figure 5*. After the falling edge of  $\text{E\_WR}$ , the data provides control bits as shown in *Table 8* with bit functionality enabled by asserting the  $\overline{\text{ENH}}$  input “low”.

### Direct Interface Mode

Direct Interface mode is selected by setting the  $\overline{\text{Bmode}}$  input “high”.

Counter control bits are set directly at the pins as shown in *Table 7*. In Direct Interface mode, main counter inputs  $\text{M}_7$  and  $\text{M}_8$ , and R counter inputs  $\text{R}_4$  and  $\text{R}_5$  are internally forced low (“0”).

**Table 7. Primary Register Programming**

Interface Mode	ENH	$\overline{\text{Bmode}}$	Smode	$\text{R}_5$	$\text{R}_4$	$\text{M}_8$	$\text{M}_7$	$\overline{\text{Pre\_en}}$	$\text{M}_6$	$\text{M}_5$	$\text{M}_4$	$\text{M}_3$	$\text{M}_2$	$\text{M}_1$	$\text{M}_0$	$\text{R}_3$	$\text{R}_2$	$\text{R}_1$	$\text{R}_0$	$\text{A}_3$	$\text{A}_2$	$\text{A}_1$	$\text{A}_0$
Parallel	1	0	0	M2_WR rising edge load				M1_WR rising edge load								A_WR rising edge load							
				$\text{D}_3$	$\text{D}_2$	$\text{D}_1$	$\text{D}_0$	$\text{D}_7$	$\text{D}_6$	$\text{D}_5$	$\text{D}_4$	$\text{D}_3$	$\text{D}_2$	$\text{D}_1$	$\text{D}_0$	$\text{D}_7$	$\text{D}_6$	$\text{D}_5$	$\text{D}_4$	$\text{D}_3$	$\text{D}_2$	$\text{D}_1$	$\text{D}_0$
Serial*	1	0	1	$\text{B}_0$	$\text{B}_1$	$\text{B}_2$	$\text{B}_3$	$\text{B}_4$	$\text{B}_5$	$\text{B}_6$	$\text{B}_7$	$\text{B}_8$	$\text{B}_9$	$\text{B}_{10}$	$\text{B}_{11}$	$\text{B}_{12}$	$\text{B}_{13}$	$\text{B}_{14}$	$\text{B}_{15}$	$\text{B}_{16}$	$\text{B}_{17}$	$\text{B}_{18}$	$\text{B}_{19}$
Direct	1	1	X	0	0	0	0	$\overline{\text{Pre\_en}}$	$\text{M}_6$	$\text{M}_5$	$\text{M}_4$	$\text{M}_3$	$\text{M}_2$	$\text{M}_1$	$\text{M}_0$	$\text{R}_3$	$\text{R}_2$	$\text{R}_1$	$\text{R}_0$	$\text{A}_3$	$\text{A}_2$	$\text{A}_1$	$\text{A}_0$

Note: \* Serial data clocked serially on  $\text{SCLK}$  rising edge while  $\text{E\_WR}$  “low” and captured in secondary register on  $\text{S\_WR}$  rising edge.



**Table 8. Enhancement Register Programming**

Interface Mode	ENH	$\overline{\text{Bmode}}$	Smode	Reserved	Reserved	Reserved	Power down	Counter load	MSEL output	Prescaler output	$f_c, f_p$ OE
Parallel	0	0	0	E_WR rising edge load							
				$\text{D}_7$	$\text{D}_6$	$\text{D}_5$	$\text{D}_4$	$\text{D}_3$	$\text{D}_2$	$\text{D}_1$	$\text{D}_0$
Serial*	0	0	1	$\text{B}_0$	$\text{B}_1$	$\text{B}_2$	$\text{B}_3$	$\text{B}_4$	$\text{B}_5$	$\text{B}_6$	$\text{B}_7$

Note: \* Serial data clocked serially on  $\text{Sclk}$  rising edge while  $\text{E\_WR}$  “high” and captured in the double buffer on  $\text{E\_WR}$  falling edge.



Figure 5. Parallel Interface Mode Timing Diagram


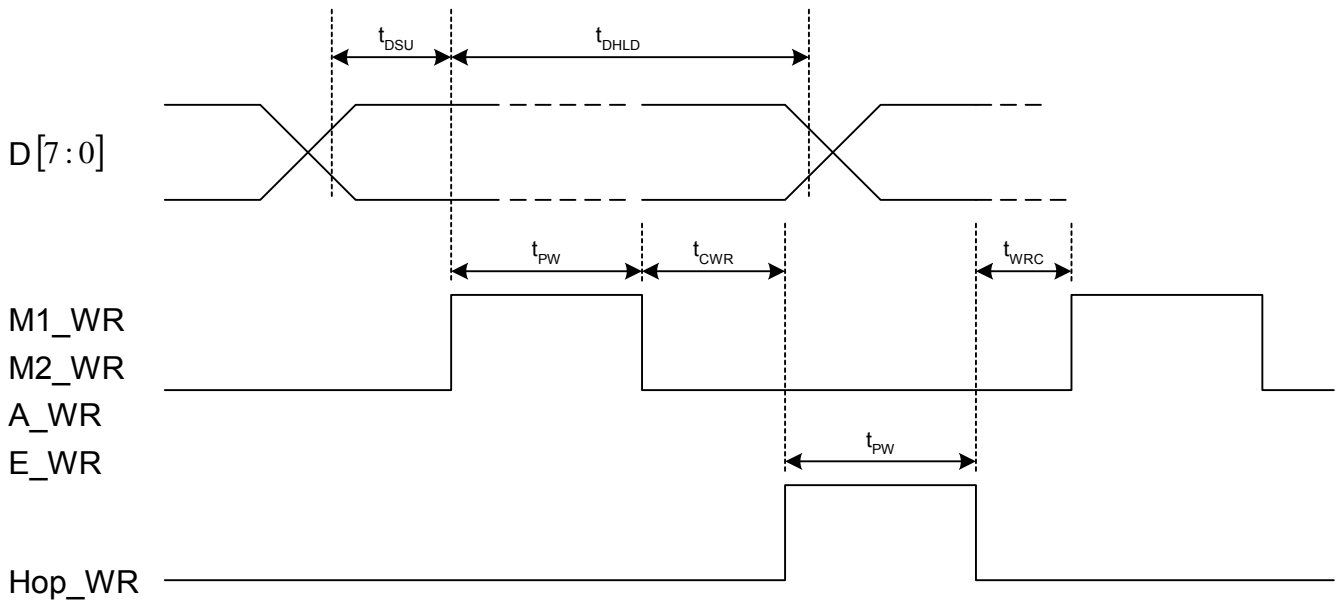


Figure 6. Serial Interface Mode Timing Diagram

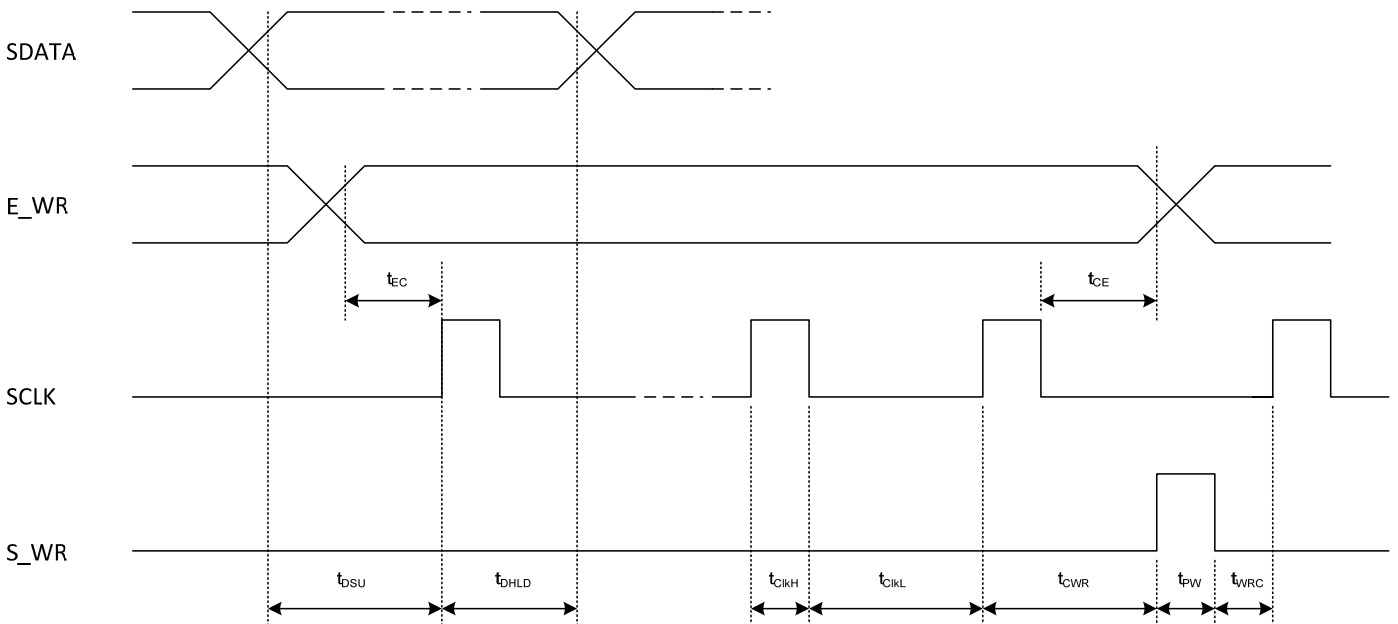

## Enhancement Register

The functions of the enhancement register bits are shown below with all bits active “high.”

**Table 9. Enhancement Register Bit Functionality**

Bit Function		Description
Bit 0	Reserved*	
Bit 1	Reserved*	
Bit 2	Reserved*	
Bit 3	Power down	Power down of all functions except programming interface.
Bit 4	Counter load	Immediate and continuous load of counter programming as directed by the $\overline{Bmode}$ and $Smode$ inputs.
Bit 5	MSEL output	Drives the internal dual modulus prescaler modulus select (MSEL) onto the $D_{OUT}$ output.
Bit 6	Prescaler output	Drives the raw internal prescaler output ( $f_{main}$ ) onto the $Dout$ output.
Bit 7	$f_p, f_c$ OE	$f_p, f_c$ outputs disabled.

Note: \* Program to 0.


## Phase Detector

The phase detector is triggered by rising edges from the main counter ( $f_p$ ) and the reference counter ( $f_c$ ). It has two outputs, namely  $PD\_U$ , and  $PD\_D$ . If the divided VCO leads the divided reference in phase or frequency ( $f_p$  leads  $f_c$ ),  $PD\_D$  pulses “low”. If the divided reference leads the divided VCO in phase or frequency ( $f_c$  leads  $f_p$ ),  $PD\_U$  pulses “low”. The width of either pulse is directly proportional to phase offset between the two input signals,  $f_p$  and  $f_c$ . The phase detector gain is 430 mV / radian.

$PD\_U$  and  $PD\_D$  are designed to drive an active loop filter which controls the VCO tune voltage.  $PD\_U$  pulses result in an increase in VCO frequency and  $PD\_D$  results in a decrease in VCO frequency.

A lock detect output, LD is also provided, via the pin  $C_{EXT}$ .  $C_{EXT}$  is the logical “NAND” of  $PD\_U$  and  $PD\_D$  waveforms, which is driven through a series 2 k $\Omega$  resistor. Connecting  $C_{EXT}$  to an external shunt capacitor provides integration.  $C_{EXT}$  also drives the input of an internal inverting comparator with an open drain output. Thus LD is an “AND” function of  $PD\_U$  and  $PD\_D$ . See Figure 4 for a schematic of this circuit.

**Figure 7. Package Drawing**  
44-lead CQFJ

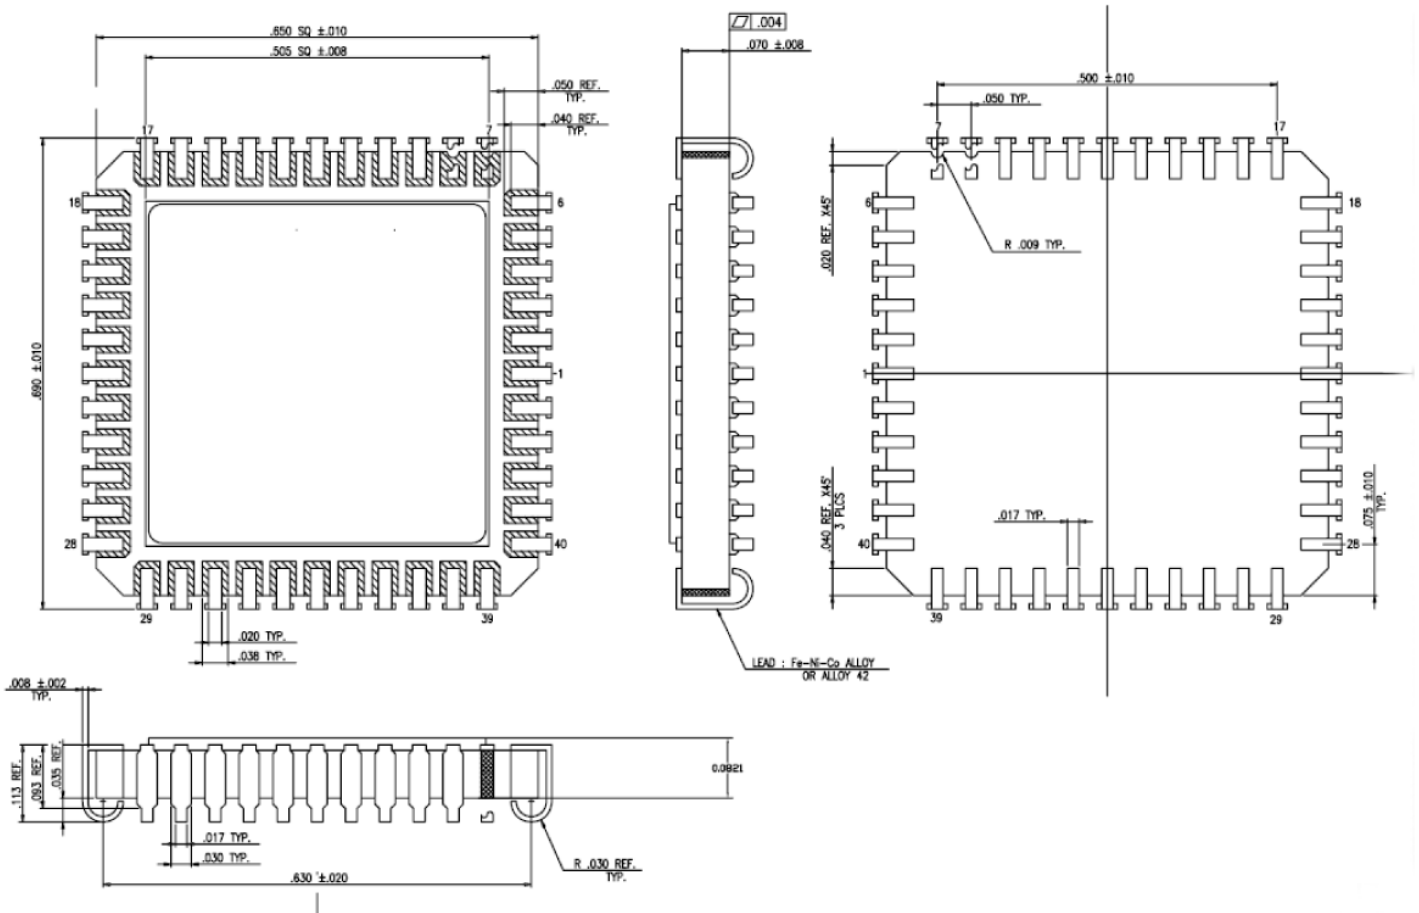

All dimensions are in inches

DOC-51819

**Figure 8. Top Marking Specifications**



PRT-50160

- △ = Pin 1 indicator
- 9702-XX = Part number (XX will be specified by the PO and/or the assembly instructions)
- YYWW = Date Code, last two digits of the year and work week
- ZZZZZZ = Lot Code (up to seven digits)
- nnnnnn = Serial number of the part (up to six digits)

**Table 10. Ordering Information**

Order Code	Description	Package	Shipping Method
9702-01*	Engineering samples	44-pin CQFJ	40 units / Tray
9702-11	Flight units	44-pin CQFJ	40 units / Tray
9702-00	Evaluation kit		1 / Box

Note: \* The PE9702-01 devices are ES (Engineering Sample) prototype units intended for use as initial evaluation units for customers of the PE9702-11 flight units. The PE9702-01 device provides the same functionality and footprint as the PE9702-11 space qualified device, and intended for engineering evaluation only. They are tested at +25 °C only and processed to a non-compliant flow (e.g. No burn-in, non-hermetic, etc). These units are non-hermetic and are not suitable for qualification, production, radiation testing or flight use.

## Sales Contact and Information

For sales and contact information please visit [www.psemi.com](http://www.psemi.com).

**Advance Information:** The product is in a formative or design stage. The datasheet contains design target specifications for product development. Specifications and features may change in any manner without notice.  
**Preliminary Specification:** The datasheet contains preliminary data. Additional data may be added at a later date. Peregrine reserves the right to change specifications at any time without notice in order to supply the best possible product.  
**Product Specification:** The datasheet contains final data. In the event Peregrine decides to change the specifications, Peregrine will notify customers of the intended changes by issuing a CNF (Customer Notification Form).

The information in this datasheet is believed to be reliable. However, Peregrine assumes no liability for the use of this information. Use shall be entirely at the user's own risk.

No patent rights or licenses to any circuits described in this datasheet are implied or granted to any third party. Peregrine's products are not designed or intended for use in devices or systems intended for surgical implant, or in other applications intended to support or sustain life, or in any application in which the failure of the Peregrine product could create a situation in which personal injury or death might occur. Peregrine assumes no liability for damages, including consequential or incidental damages, arising out of the use of its products in such applications.

The Peregrine name, logo, UltraCMOS and UTSi are registered trademarks and HaRP, MultiSwitch and DuNE are trademarks of Peregrine Semiconductor Corp. Peregrine products are protected under one or more of the following U.S. Patents: <http://patents.psemi.com>.