ATTENTION observe precautions for handling ELECTROSTATIC SENSITIVE DEVICES

PROPRIETARY DATA
This document may not be reproduced, disclosed, or otherwise used, in whole or in part, without the written permission of SIRENZA MICRODEVICES

REVISION HISTORY

REV	DESCRIPTION	ECO	APPR	DATE
A	INITIAL RELEASE	1882	RIVAS	11/8/02

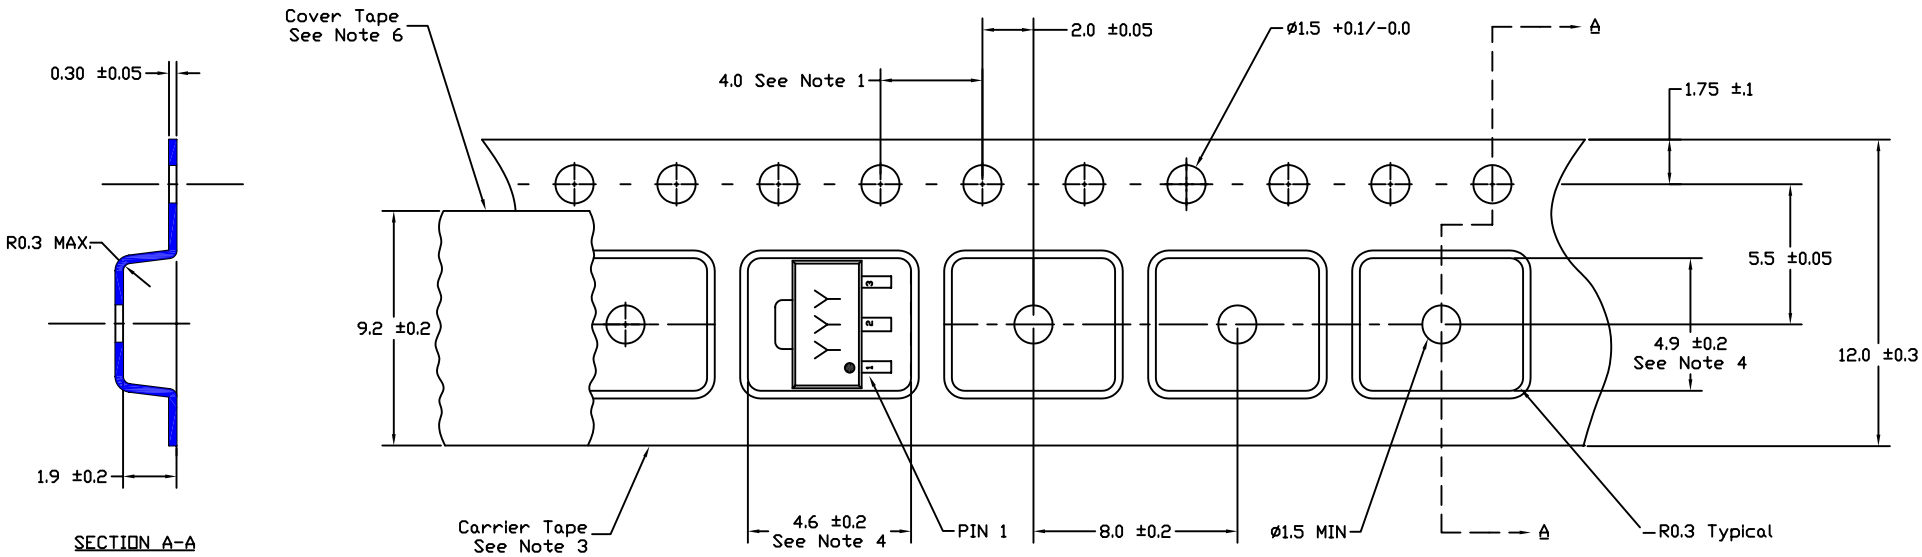

GENERAL NOTES

1. 10 sprocket hole pitch cumulative tolerance
2. Camber not to exceed 1mm in 100mm
3. Material: Black Conductive Polystyrene
4. Measured on a plane 0.3mm above the bottom of the pocket.
5. Measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
6. Material: Antistatic Polyester Film

THIRD ANGLE PROJECTION

NEXT ASSY	MODEL
---	---

WHERE USED

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM [INCHES] PER ANSI Y14.5M-1982.
TOLERANCES ARE:
DECIMAL .XX ±0.25[0.1] .XXX±0.127[.005]
ANGLE ±1/2°

MATERIAL(S): ---

FINISH: ---

SCALE: DO NOT SCALE DRAWING

	SIGNATURE	DATE
DRG		
CHK		
TRD		

Dwg Template: DDC-102671 (A)

SIRENZA MICRODEVICES

DWG TITLE: Component Tape & reel Packaging
SOT-89 (Exposed Pad)

SIZE B | DWG NO. MPO-102768 | REV A

SHEET 1 OF 1