PROPRIETARY DATA
This document may not be reproduced, disclosed, or otherwise used, in whole or in part, without the written permission of SIRENZA MICRODEVICES

ATTENTION observe precautions for handling ELECTROSTATIC SENSITIVE DEVICES

REVISION HISTORY				
REV	DESCRIPTION	ECO	APPR	DATE
A	INITIAL RELEASE	1917	RIVAS	12/11/02

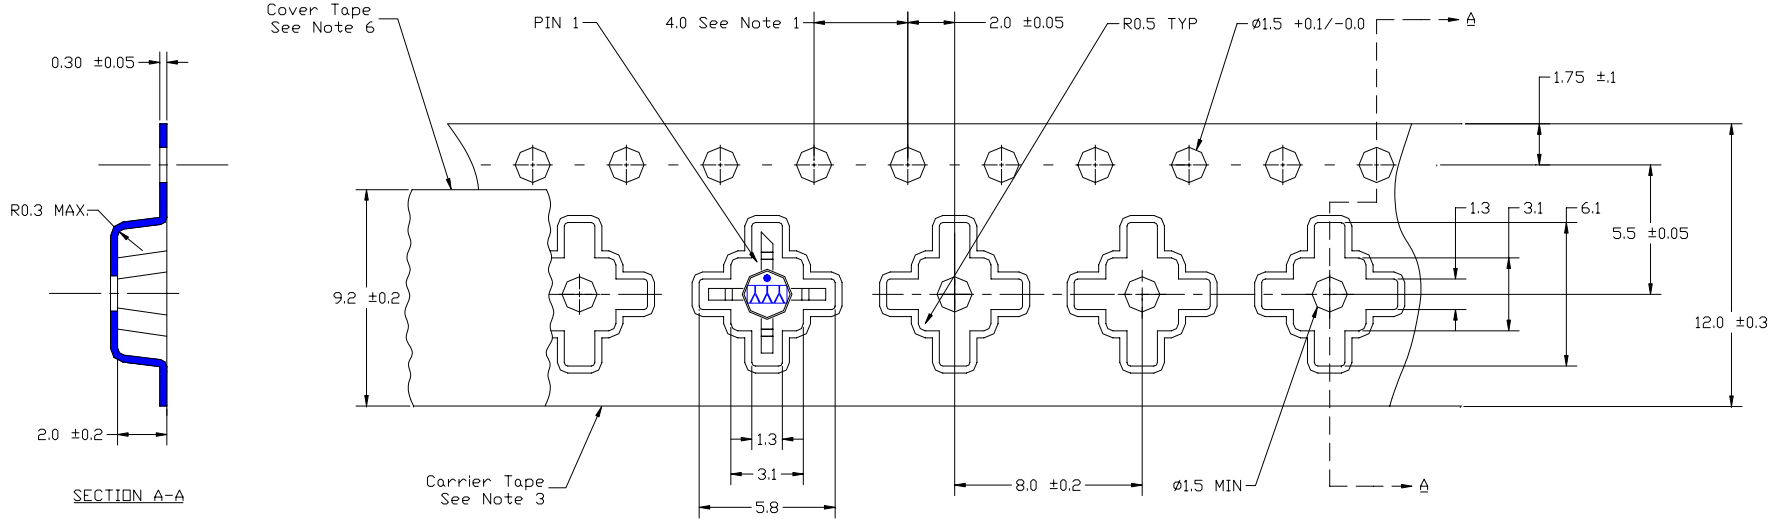

GENERAL NOTES

1. 10 sprocket hole pitch cumulative tolerance
2. Camber not to exceed 1mm in 100mm
3. Material: Black Conductive Polystyrene
4. Measured on a plane 0.3mm above the bottom of the pocket.
5. Measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
6. Material: Antistatic Polyester Film

THIRD ANGLE PROJECTION

NEXT ASSY	MODEL
---	---

WHERE USED

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM [INCHES] PER ANSI Y14.5M-1982.
TOLERANCES ARE:
DECIMAL .XX ±0.25[0.1] .XXX±0.127[.005]
ANGLE ±1/2°

MATERIAL(S): ---

FINISH: ---

SCALE: DO NOT SCALE DRAWING

	SIGNATURE	DATE
DRG		
CHK		
TRB		

Dwg Template: DDC-102671 (A)

DWG TITLE: Component Tape & reel Packaging
86 Plastic

SIZE B | DWG NO. MPO-102772 | REV A

SHEET 1 OF 1