

# DC-DC Converter Specification

## MPDRX303S,MPDRX304S

### 1. Application

This specification applies to DC-DC Converter for telecommunication / data-communication equipment, MPDRX303S,MPDRX304S.

For any other application, please contact us before using this product.


### 2. Customer Reference

Customer Spec. Number  
Customer Part Number

### 3. Murata Part Number


MPDRX303S,MPDRX304S

### 4. Appearance, Dimensions

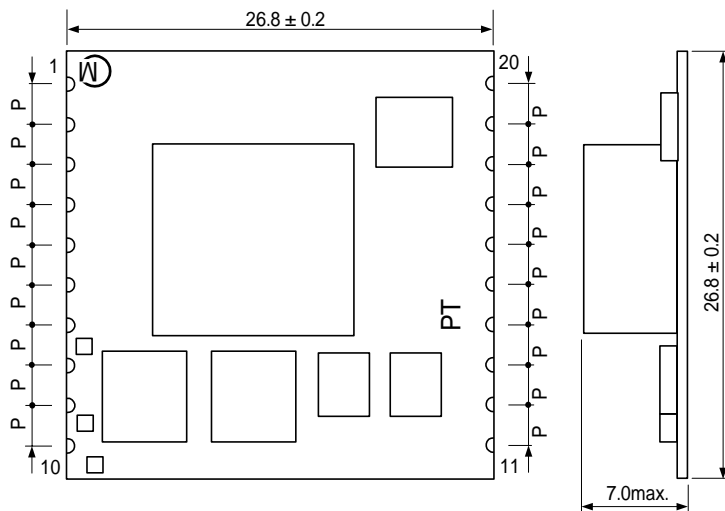

( )...reference value  
P=2.54 ± 0.2mm  
Tolerance is not accumulated.

#### Marking

- (1) Pin No.1 Marking / MFG ID   
(2) Parts No. PT

E : MPDRX303S

D : MPDRX304S

- (3) Lot No.

Production factory Mark

Production Year

Production Month ( 1,2,3,...9,O,N,D )

Flux may expand on PCB and attach onto the area where the marking is printed with laser.

In the case the marking become darker in color since flux is unreflecting.

It may be a little hard to read, however, the marking is not deleted nor blurred.


#### ⚠ Note:

- This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

## 5. Pin Number and Function

Pin No.	Symbol	Function
1	SENSE	Output voltage sense
2,3,4	Vout	Output
5,6,7,8,13,14,15	GND	GND
9,	FT	Output trim
10,	VAR	Output voltage adjustment
11,12	Vin	Input
17,	SS	Soft start
18	N.C.	This pin must be left open.
19	POW-GOOD1	Power Good
20	POW-GOOD2	Power Good
16	ON/OFF	Remote ON/OFF

## 6. Block Diagram

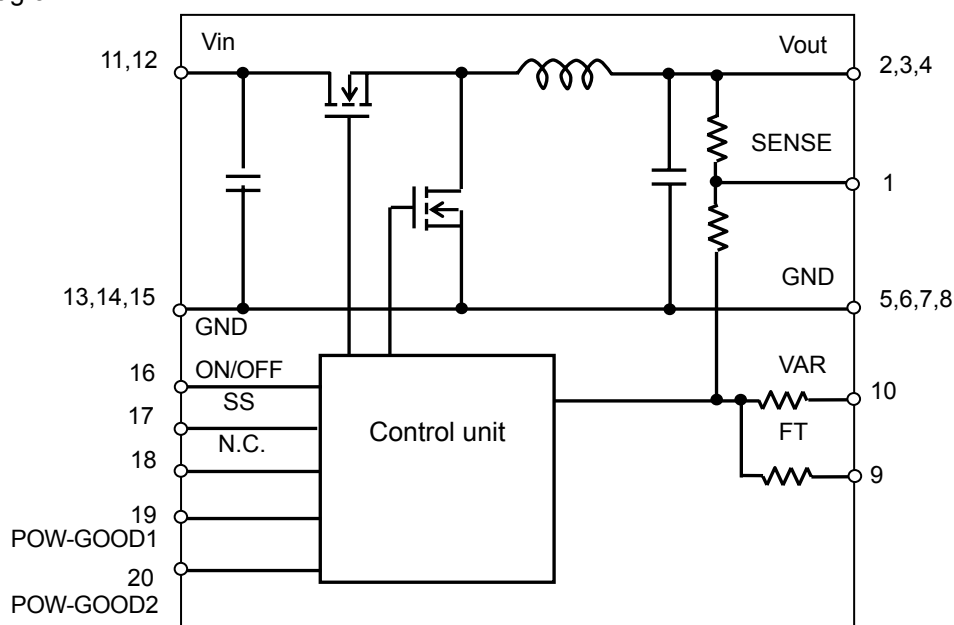

## 7. Environmental Conditions

7.1 Operating Temperature Range	-40°C ~ +85°C
7.2 Storage Temperature Range	-40°C ~ +85°C
7.3 Operating Humidity Range	20% ~ 85% (No water condenses in any cases.)
7.4 Storage Humidity Range	10% ~ 95% (No water condenses in any cases.)

## 8. Absolute Maximum Rating

Item	Unit	Absolute Rating	Remarks
Minimum Input Voltage	V	0	
Maximum Input Voltage POW-GOOD Pin Voltage	Time	Continuous	14
		10ms	15
ON/OFF Pin Voltage	V	7	However, below Vin
Maximum POW-GOOD Sink Current	mA	15	Total of PG1 and PG2

No voltage, no matter how instantaneous, shall be applied beyond the absolute maximum voltage rating to this product. If you apply any voltage over this limit the product characteristics will deteriorate or the product itself will be destroyed. Even though it may continue operating for a while after the over-voltage event, its life will likely be shortened significantly. Reliability and life of the module may degrade similarly if the maximum operating voltage rating is continuously exceeded. This product is designed to operate within the maximum operating voltage rating specification.

## ⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

## 9. Characteristics

## 9.1. Electrical Characteristics

## 9.1.1. Input Characteristics (Ta= 25°C)

Item	Symbol	Condition	Value			Unit
			Min.	Typ.	Max.	
Input Voltage Range	Vin		6.2	9.6	13.2	V
Rising UVLO Threshold	UVLOr	Vin = increasing	-	5.25	-	V
Falling UVLO Threshold	UVLOf	Vin = decreasing	-	5.0	-	V

Any malfunctions can never happen for this products due to returned input ripple noise.

## 9.1.2. Interface Characteristics (Ta= 25°C)

Item	Symbol	Condition	Value			Unit	
			Min.	Typ.	Max.		
Power Good	PWGL	Power Good low threshold, Ta=25°C	-	0.87Vo	-	V	
	PWGH	Power Good high threshold, Ta=25°C	-	1.13Vo	-		
ON/OFF pin High Voltage	VIH	ON/OFF pin is pulled up to 5V inside of the DC-DC converter. If ON/OFF pin is left open, the DC-DC converter shall be "ON". This pin will be pulled down to GND inside the DC-DC converter when UVLO events occur. Please do NOT connect this pin to power supply with low impedance line, so as not to damage the converter.					
ON/OFF pin Low Voltage	VIL	If ON/OFF pin is pulled down to GND, the DC-DC converter shall be "OFF".	OFF	0	-	1.0	V

## 9.1.3. General Characteristics (Ta= 25°C)

## (1)MPDRX303S

Item	Symbol	Condition	Value			Unit	
			Min.	Typ.	Max.		
Output Voltage Range	Vout	FT= Short	1.6		3.63	V	
Output Current	Iout	See the Power derating curve in clause 9.1.4	0	-	26	A	
Output Voltage Tolerance	Vo tol	Over Io, Temperature range Vin=6.2~13.2V Rset=1% tolerance, FT= Short	-2.0	-	+2.0	%V	
Ripple Voltage	Vrpl	BW = 20 MHz, Vout=3.3V, Iout = 0 ~ 26 A, Cout=200μF		20	100	mV(pp)	
Efficiency	EFF	Vin =9.6V, Iout=26A	Vout=3.3V	-	91	-	%
			Vout=2.5V	-	88	-	
			Vout=1.8V	-	86	-	
Operating Frequency	Frq	Vin =9.6V, Vout=3.3V	-	600	-	kHz	
		Vin =9.6V, Vout=1.8V	-	350	-		
Short Circuit Protection	SCP	If output is shorted to GND, DC-DC converter will shut down. (mask time 180mstyp)After reject the abnormal mode , DC-DC converter will restart by re-inputting Vin or toggling ON/OFF pin.	26	46	-	A	
External Input Capacitor	Cin	When input voltage is ideal voltage source	40	-	5000	μF	
External Output Capacitor	Cout	When input voltage is ideal voltage source	200	-	2000	μF	
Ramp Rate	Tr	Vo=10% ~ 90%,SS= Open	1	2	5	msec	
Rising Overshoot	Vover		-	0	+10	%Vo	
Startup Delay	Td	ON/OFF High : Vin Low →High Vo=10% SS= Open	0.1	0.5	2	msec	
ON/OFF Startup Delay	Trcd	Vin High : ON/OFF Low → High/Open Vo=10%	0.1	0.4	2	msec	

## ⚠ Note:

- This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

## (2) MPDRX304S

Item	Symbol	Condition	Value			Unit	
			Min.	Typ.	Max.		
Output Voltage Range	Vout	FT= Open	0.8	-	0.95	V	
		FT= Short	0.95	-	1.65		
Output Current	Iout	See the Thermal derating curve in clause 9.1.4	0	-	26	A	
Output Voltage Accuracy	Vo tol	Over Io, temperature range Vin=6.2~13.2V, Rset=1% tolerance	Vout=0.8 ~ 0.95V FT= Open, Ta=0 ~ 85°C	-2.0	-	+2.0	%Vo
		Vout=0.8 ~ 0.95V FT=Open, Ta=-40 ~ 0°C	-2.5	-	+2.5		
		Vout=0.95 ~ 1.65V FT= Short	-2.0	-	+2.0		
Ripple Voltage	Vrpl	BW = 20MHz Vout=1.2V, Iout = 0 ~ 26 A, Cout=200μF		15	100	mV	
Efficiency	EFF	Vin =9.6V, Iout=26A	Vout=1.5V	-	85	-	%
			Vout=1.2V	-	83	-	
			Vout=0.8V	-	79	-	
Operating Frequency	Frq	Vin =9.6V, Vout=1.5V	-	550	-	kHz	
		Vin =9.6V, Vout=0.8V	-	320	-		
Short Circuit Protection	SCP	If output is shorted to GND, DC-DC converter will shut down. (mask time 180mstyp)After reject the abnormal mode , DC-DC converter will restart by re-inputting Vin or toggling RC pin.	26	46	-	A	
External Input Capacitor	Cin	When input voltage is ideal voltage source	40	-	5000	μF	
External Output Capacitor	Cout	When input voltage is ideal voltage source	200	-	2000	μF	
Ramp Rate	Tr	Vo=10% ~ 90% SS= Open	1	2	5	msec	
Rising Overshoot	Vover		-	0	+10	%	
Startup Delay	Td	ON/OFF High → Vo=10% SS= Open	0.1	0.5	2	msec	
ON/OFF Startup Delay	Trcd	ON/OFF Low → High/Open ,Vo=0-10%	0.1	0.4	2	msec	

This DC-DC converter thermally shuts down when temperature of a control IC reaches to 180 °C typically.

 Caution

The above electrical characteristics are guaranteed with the condition that the impedance of the input voltage source is sufficiently low as shown in section 10. Connecting an input inductance or using an input power supply with output inductance may cause an unstable operation of this device. Please check the proper operation of this device with the peripheral circuits on your system.


 Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

## 9.1.4. Thermal Derating


(1) MPDRX303S

MPDRX303S  
( $V_{in}=6.2 \sim 12V$ ,  $V_{out}=1.6 \sim 3.63V$ ,  
Airflow:  $0 \sim 3.0m/s$ )

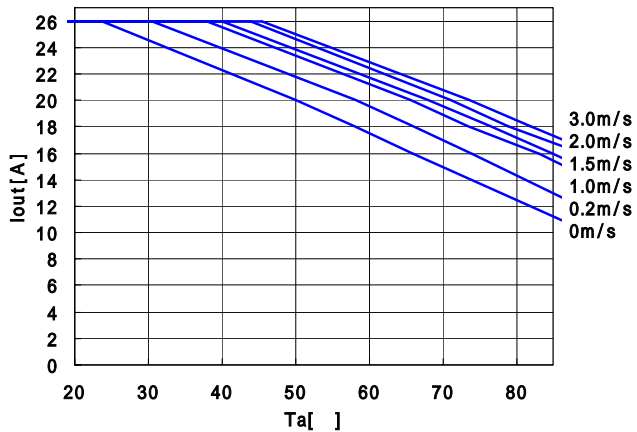


(2) MPDRX304S

MPDRX304S  
( $V_{in}=6.2 \sim 12V$ ,  $V_{out}=0.8 \sim 1.65V$ ,  
Airflow:  $0 \sim 3.0m/s$ )

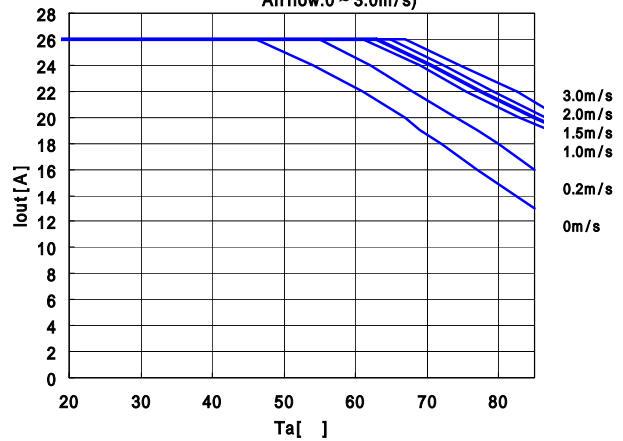

The above derating limits apply to this product soldered directly to 101.6\*180mm\*1.6mm PCB (6 layer). Any adjacent parts of high temperature may cause overheating. For reliable operation, please ensure that the FET temperature of this product is maintained below 120°C and the inductor temperature is below 106°C.

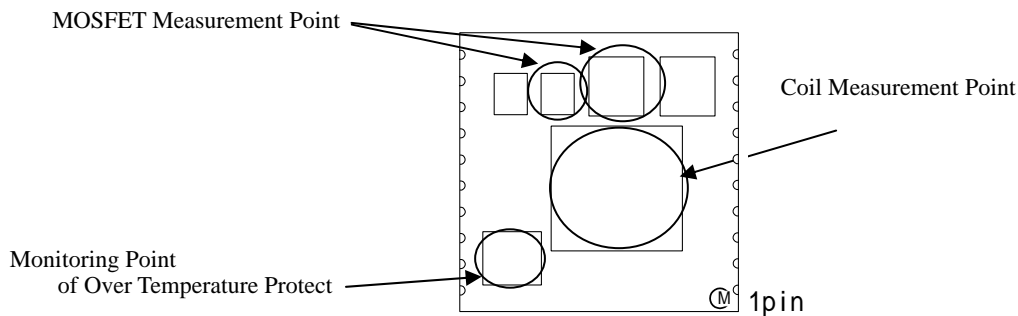

⚠ **Note:**


1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

9.2. Operation Information

9.2.1. Power Good


Powergood signal is appeared within the value of clause 9.1.2 (Open-drain output)

Output voltage is within voltage detection threshold: POW-GOOD is open.  
 Output Voltage is out of voltage detection threshold : POW-GOOD is connected to GND.



9.2.2. Output voltage sensing

By connecting SENSE-pin to the load, output voltage drop in wiring shall be compensated.

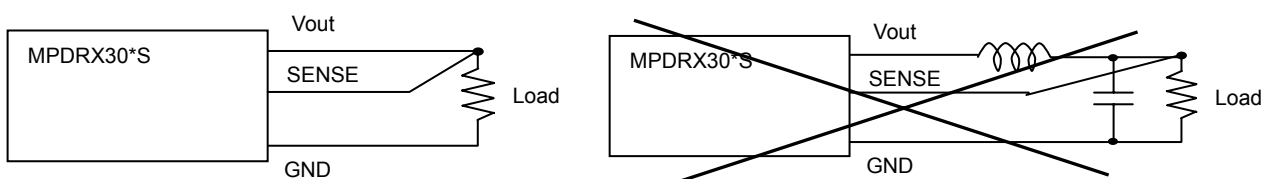


Please do NOT connect SENSE-pin to the output of LC filter that is set to the Vout line.  
 When using this way, this product will not operate properly.

< Caution >

Please connect SENSE-pin to Vout-pin nearby the product, if sense function is not used.

9.2.3. Soft start function

By using the soft start function, ramp-rate of the output-starting is adjustable. Adjustment range of ramp-rate is from 2 to 10ms. Ramp rate is adjusted by external capacitor between SS-pin(17pin) and GND.

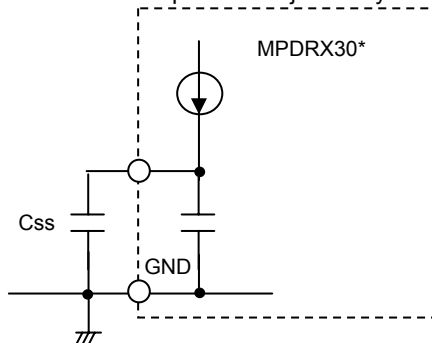

The equation of starting time about output voltage


$$\text{Starting time: } T_d = \frac{(C_{ss} + 1.2 \times 10^{-8}) \times 0.8}{5 \times 10^{-6}} + 2 \times 10^{-4} \text{ [s]}$$

C<sub>ss</sub> : The capacitance of external capacitor.(F)

9.2.4. ON/OFF control

By using ON/OFF function, the operation of this product can be disabled without disconnection of input voltage.

- When RC-pin(16pin) is left open ..... Output Voltage =ON
- When RC-pin(16pin) is connected to GND ..... Output Voltage =OFF

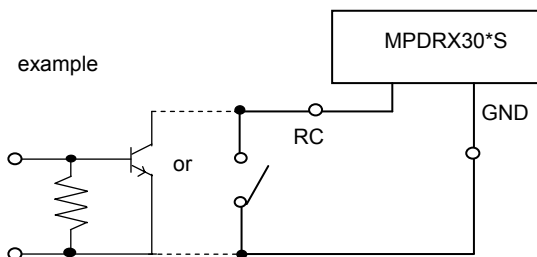

< Caution >

RC pin is pulled up inside of the DC-DC converter, so voltage appears up to 7V at RC pin.  
 RC pin will be pulled down to GND inside the DC-DC converter when UVLO events occur.  
 Please do NOT connect this pin to power supply, so as not to damage the converter.

⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

### 9.2.5. Parallel Operation.

This product is incapable of parallel operation


### 9.2.6. Output Voltage Adjustment

The output voltage can be adjusted by connecting resistors between VAR-pin(10Pin) to GND-pin.

The following equation gives the required external-resistor value to adjust the output voltage to Vo-adj.

It is highly recommended that evaluation of the characteristics of this DC-DC converter's operation under your board conditions be thoroughly conducted.

In case output voltage is used more than 0.95V, please connect FT-pin(9pin) to GND.

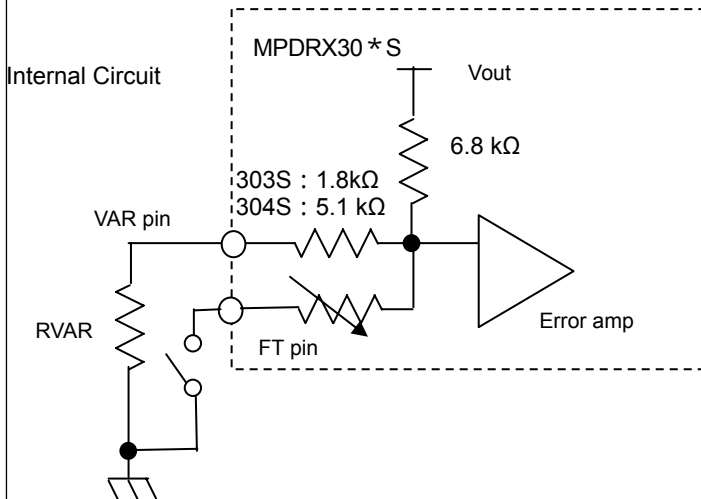

(1)MPDRX303S (FT-pin : SHORT to GND)

$$RVAR = \frac{5440}{Vo-adj[V] \times 1.002 - 1.5[V]} - 1800 \quad [\Omega]$$

(2)MPDRX304S

(a)0.8 Vout < 0.95V (FT-pin : OPEN)

$$RVAR = \frac{5440}{Vo-adj[V] \times 1.002 - 0.8[V]} - 5100 \quad [\Omega]$$

(b)0.95 Vout 1.65V (FT-pin : SHORT to GND)

$$RVAR = \frac{5440}{Vo-adj[V] \times 1.002 - 0.95[V]} - 5100 \quad [\Omega]$$

< RVAR calculation example >

(1)MPDRX303S


Vo-adj [V]	Calculated RVAR[Ω]	FT pin(8pin)
3.63	745	Short to GND
3.3	1211	Short to GND
2.5	3613	Short to GND
1.8	16118	Short to GND
1.6	50913	Short to GND

(2)MPDRX304S

Vo-adj [V]	Calculated RVAR[Ω]	FT pin(8pin)
1.65	2635	Short to GND
1.5	4737	Short to GND
1.2	16453	Short to GND
1.0	99515	Short to GND
0.95	2858058	Short to GND
0.9	48338	Open
0.8	3394900	Open

### 9.2.7. Reset Condition

In order to reset all function, the input Voltage is set under 0.5V for Min.100 m second or ON/OFF pin voltage is set under 1.0V for Min 10m second.

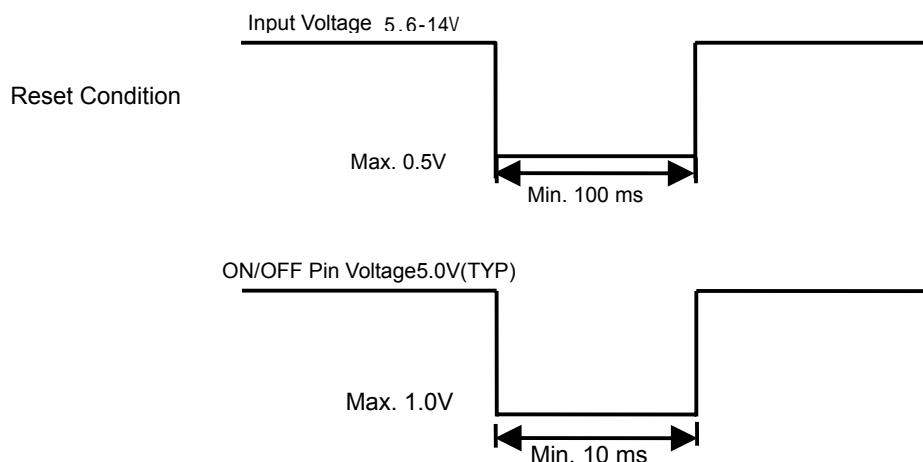

#### ⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

## 9.3. Reliability

## 9.3.1. Humidity

According to JIS-C-0022.

40 ± 2°C, 90 to 95%RH, 100 hours. Leave for 4 hours at room temperature.

No damage in appearance and no deviation from electrical characteristics (section 9.1.).

## 9.3.2. Temperature Cycles

Repeat cycle 5 times. Leave 2 hours at room temp.

No damage in appearance and no deviation from electrical characteristics (section 9.1.).

Step	Condition	Time
1	-40°C ± 3°C	30 minutes
2	Room Temp.	5-10 minutes
3	+85°C ± 2°C	30 minutes
4	Room Temp.	5-10 minutes

## 9.3.3. Vibration

10 to 55Hz, 1.5mm amplitude (1minute cycle), 1 hour for each of X, Y, Z directions.

No damage in appearance and no deviation from electrical characteristics (section 9.1.).

## 9.3.4. Mechanical Shock


20G, 1 time for each X, Y, Z directions.

No damage in appearance and no deviation from electrical characteristics (section 9.1.).

## 10. Test Circuit

In the following test circuit, the initial values under item 9.1. should be met.

## 10.1. General Measure Circuit

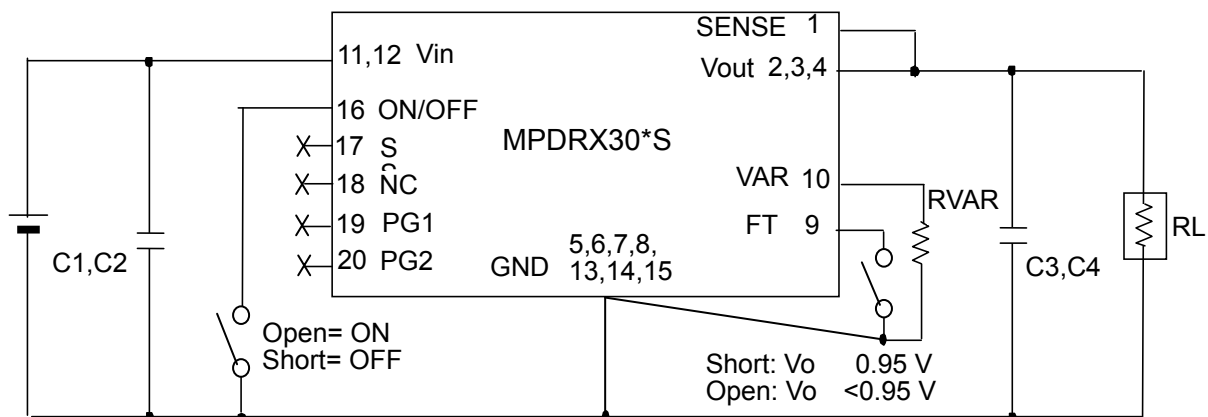

C1,C2 : 22 $\mu$ F / 25V $\times$ 2 (Ceramic Capacitor)

C3,C4 : 100 $\mu$ F / 6.3V $\times$ 2 (Ceramic Capacitor)


Please make sure to place C1, C2,C3 and C4 nearby input and output terminal of DC-DC converter.

## ⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.



## 10.2. Ripple Noise Measurement Circuit

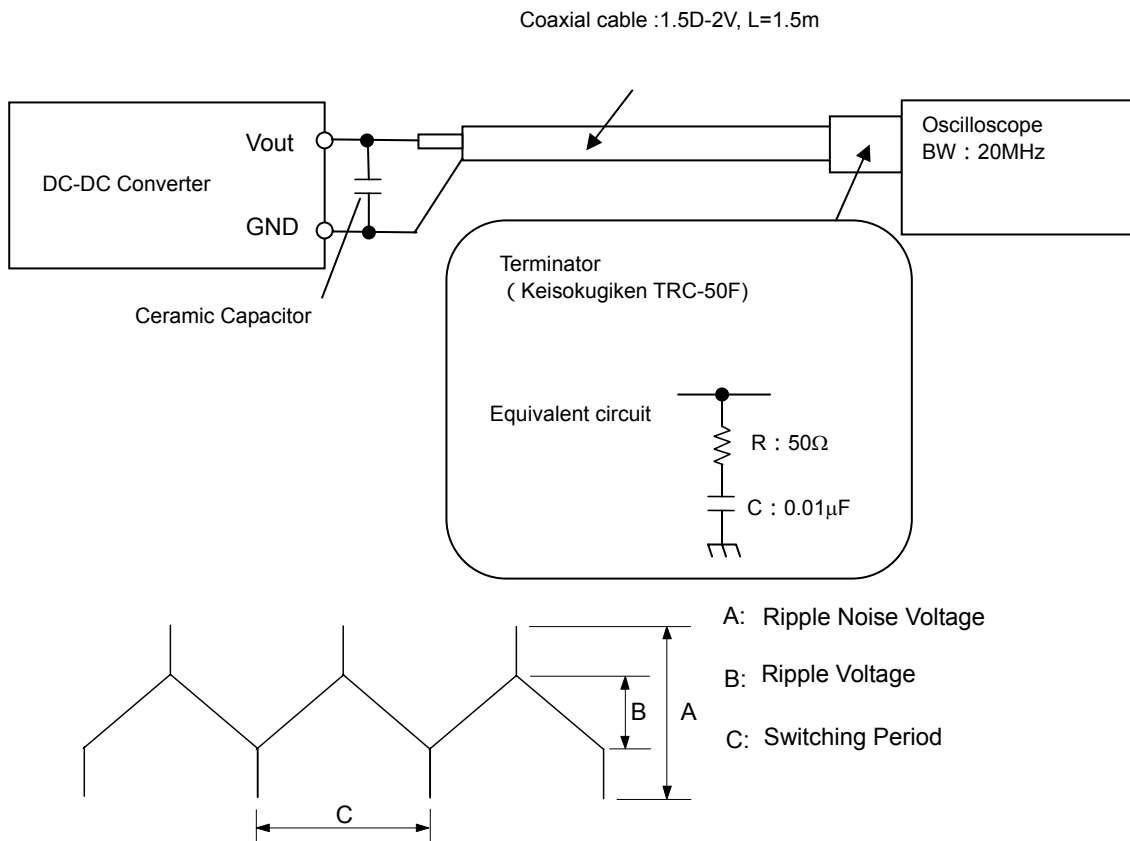⚠ **Note:**

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

## 11. Packaging Specification

## 11.1. Tray Dimensions

DC-DC converters are put in the trays. (See Fig.11-1)

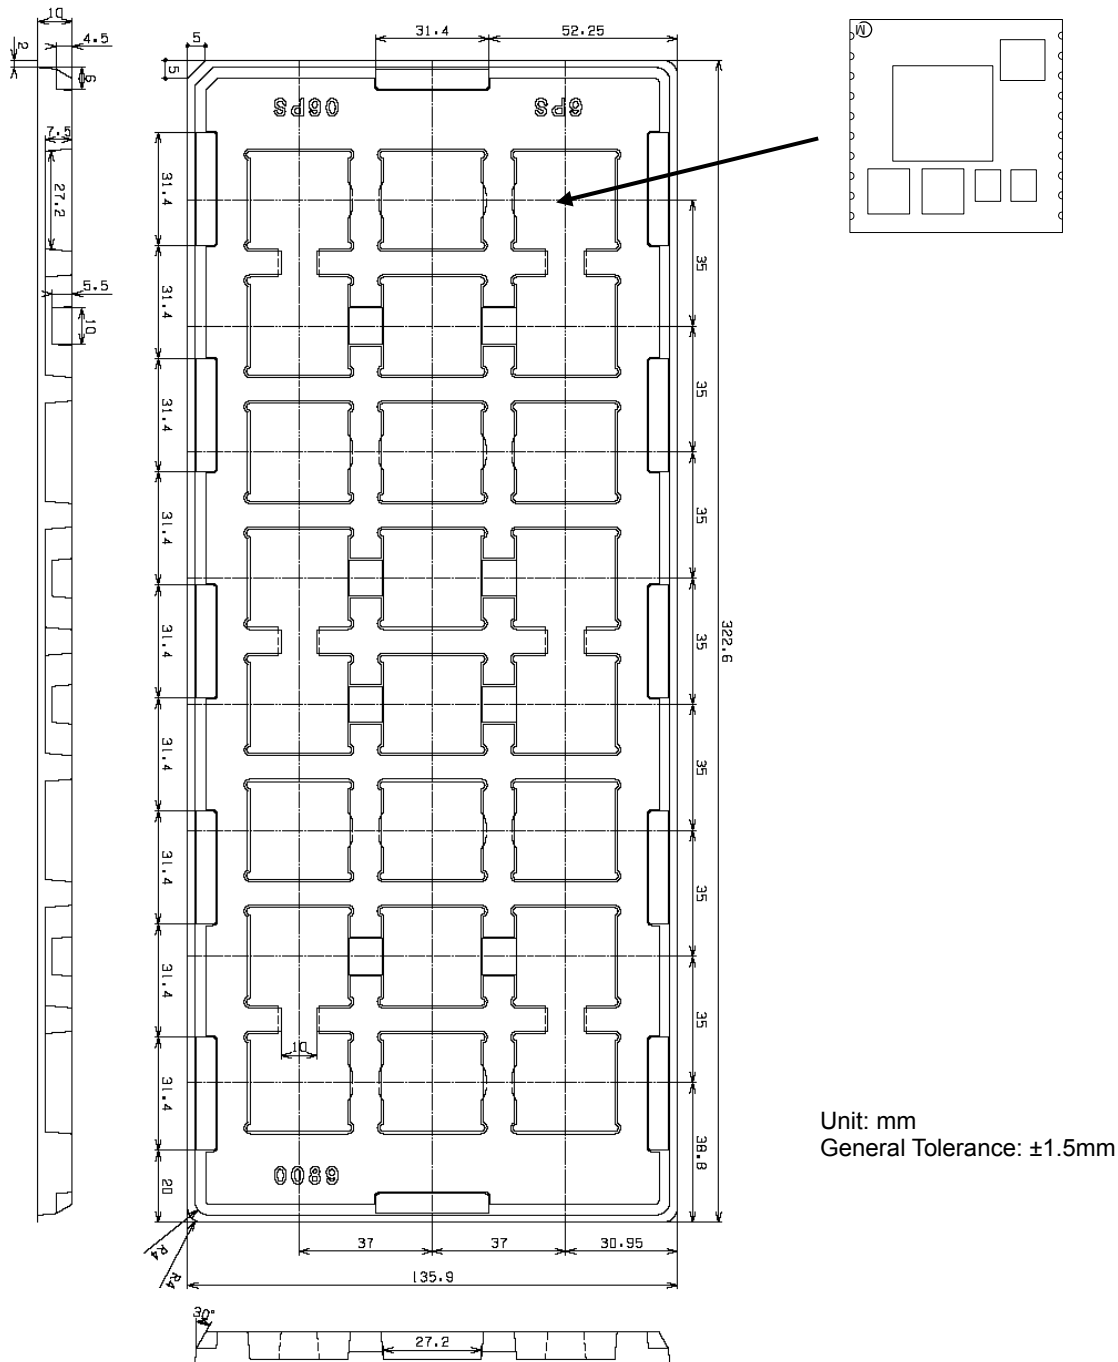




Fig.11-1

⚠ **Note:**

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

- 11.2. Contained pieces of products per corrugated box.  
Maximum Contained products pieces 96 pcs/corrugated box.  
Further plural sheets of corrugated cardboard are placed on the top of the dummy tray according to number of contained trays in order to full up the space in a corrugated box.

- 11.3. Packaging Form  
Trays with products are lidded and packed in a corrugated box. (See Fig.11-2)

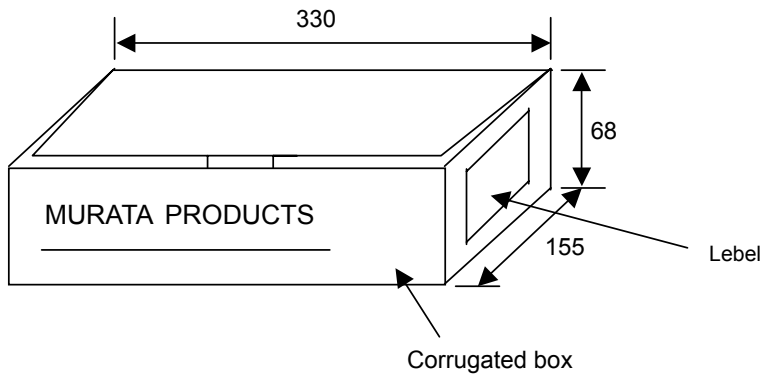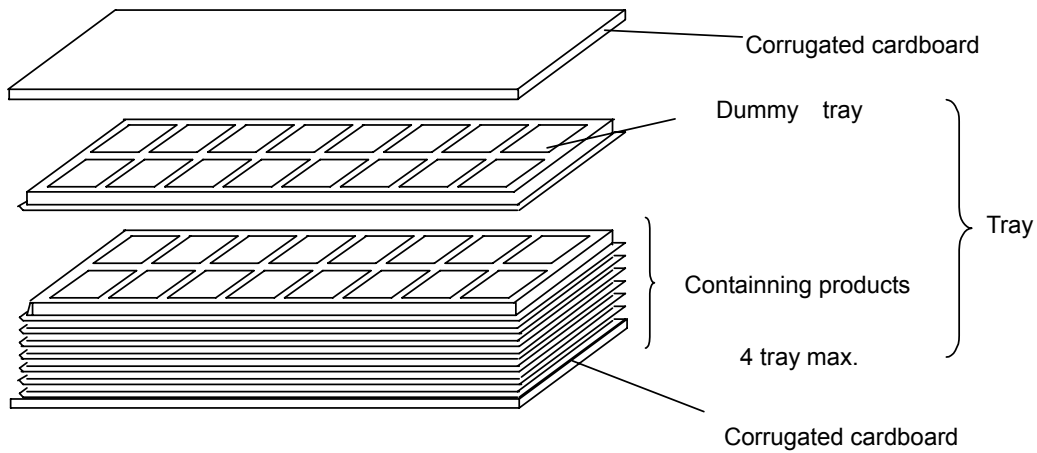

Dimension [unit : mm]of  
Corrugated box is reference only.

Fig.11-2

## 12. Production factory


Komatsu Murata Mfg.Co., Ltd.  
Kanazu Murata Mfg. Co., Ltd.  
Wakura Murata Mfg. Co., Ltd.

### ⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

### 13. Caution

1. Be sure to provide an appropriate fail-safe function on your product to prevent secondary damage that may be caused due to abnormal functional or failure of this product.
2. Inrush current protection is not a feature of this product.
3. Please connect the input terminals with the correct polarity. If an error in polarity connection is made this product may be damaged. If this product is damaged internally, an elevated input current may flow, and so this product may exhibit an abnormal temperature rise, or your product may be damaged. Please add a diode and fuse per the following diagram to protect them.

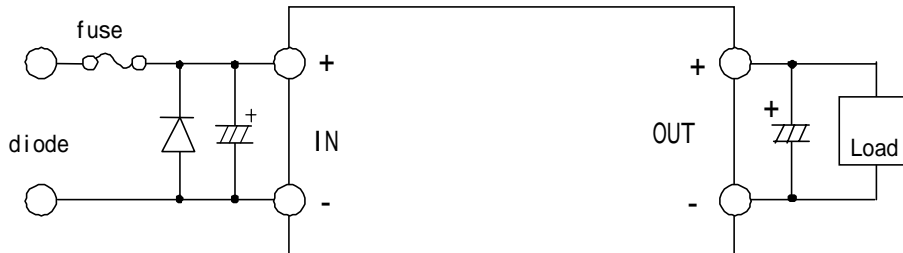

Please select diode and fuse after confirming the operation of your product.

### 4. Limitation of Application

Please contact us before using this product for the applications listed below which require especially high reliability for the prevention of defects, which might directly cause damage to the third party's life, body or property.

Aircraft equipment  
 Aerospace equipment  
 Undersea equipment  
 Power plant control equipment  
 Medical equipment  
 Transportation equipment (vehicles, trains, ships, etc.)  
 Traffic signal equipment  
 Disaster prevention /crime prevention equipment  
 Any other application of similar complexity and/or reliability requirements to the applications listed above.

### 14. Notice

#### 14.1. Soldering


##### 14.1.1. Flux

Please solder this product with Rosin Flux that contains of 0.2wt% or less chlorine.  
 Please do not use high activity acid flux or water-soluble flux as they may reduce the reliability of this product.

#### Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

## 14.1.2. PCB Land Pattern Recommendation

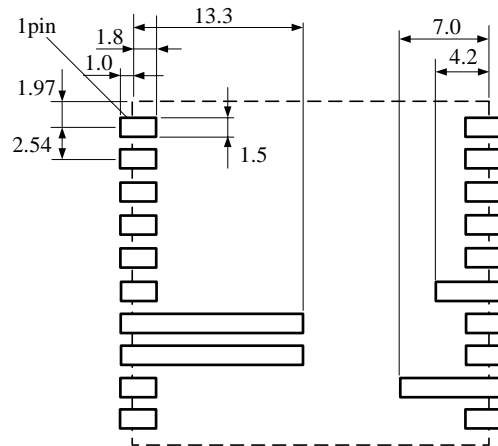

## 14.1.3. Soldering Conditions Recommendation

## Reflow Soldering

This product is RoHS compliant. The following profile is recommended for the reflow of this product using Pb-free solder paste (Sn-Ag-Cu).

Method : Full convection reflow soldering

## Reflow Soldering Profile


JEDEC IPC/JEDEC J-STD-020D

Table 5-2 Classification Reflow Profile

Pb-Free Assembly Large Body

## Profile details


Soldering temperature : 245°C+0/-5°C  
 Soldering time : 30 seconds, 240 to 245°C  
 Heating time : 60 to 150 seconds, over 217°C  
 Preheating time : 60 to 120 seconds, 150 to 200°C  
 Programming rate : 3°C/ sec. Max., 217 to 245°C  
 Descending rate : 6°C/ sec. Max.  
 Total soldering time : 8 minutes Max., 25 to 245°C  
 Times : 1 time

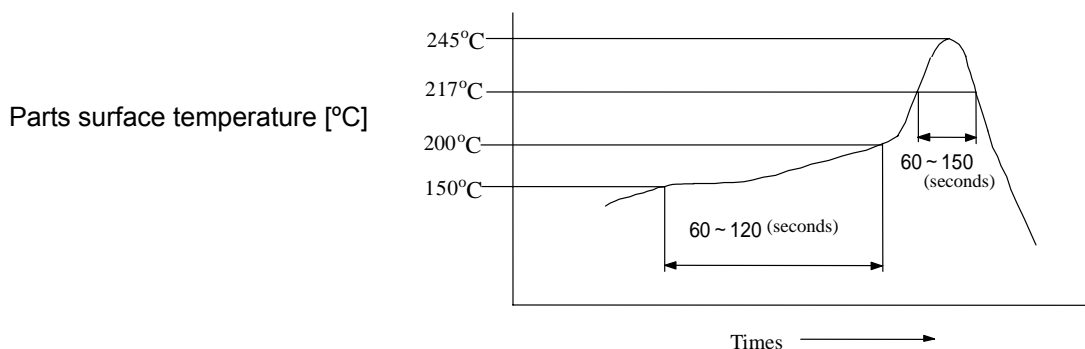

Do not vibrate for the products on reflow.

Please need to take care temperature control because mounted parts may come off if the product are left under the high temperature.

Do not reflow DC-DC converter as follows, because DC-DC converter may fall down from a substrate during reflowing.

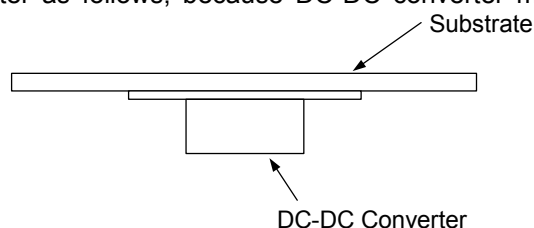

## ⚠ Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

#### 14. 2. Cleaning

Please use no-cleaning type flux and do not wash this product.

#### 14.3. Storage

14.3.1. Please store the products in room where the temperature/humidity is stable and direct sunlight cannot come in, and use the products within 6 months after delivery.

Please avoid damp and heat or such places where the temperature greatly changes, as water may condense on this product, and the quality of characteristics may be reduced, and/or be the solderability may be degraded.

If this product needs to be stored for a long time (more than 1 year), this product may be degraded in solderability and/or corroded. Please test the solderability of this product regularly.

Baking before reflow process is unnecessary to store the products under 30 ± 5 °C, 60%RH or less up to 6 months.

In case the storage condition is over above mentioned, if these are unpacked condition, please bake them at 125 ± 5 °C /24hour. If these are packed in a tape, please bake them before soldering at 60 ± 5 °C /168hour.

14.3.2. Please do not store this product in places such as :

A dusty place, a place exposed directly to sea breeze, or in an atmosphere containing corrosive gas (Cl<sub>2</sub>,NH<sub>3</sub>,SO<sub>2</sub>,NOX and so on).

#### 14. 4. Operational Environment and Operational Conditions

##### 14.4.1. Operational Environment

This product is not water-, chemical- or corrosion-proof.

In order to prevent leakage of electricity and abnormal temperature rise of the product,do not operate under the following environmental conditions:

- (1) An atmosphere containing corrosive gas (Cl<sub>2</sub>, NH<sub>3</sub>, SO<sub>2</sub>, NOX and so on)
- (2) A high-dust environment
- (3) Under the exposure of direct sunlight
- (4) A location where the likelihood of exposure to water or water condensation exists.
- (5) A location exposed to ocean air
- (6) Any locations similar to the above

##### 14.4.2. Operational Conditions

Please use this product within specified values (power supply, temperature, input, output and load condition, and so on). If the product is exposed to conditions outside of the specified values reliability of the product may be adversely effected.

##### 14.4.3. Note prior to use

Diminished reliability and/ or failure may result if the product is exposed to a high-level static charge, over-rated voltage or reverse voltage. Please avoid the following conditions be avoided prior to use of the product:

- (1) Supply of power outside of rated values (see section 8)
- (2) Supply of reverse power or inadequate connection of a 0 V(DC)line
- (3) Electrostatic discharge from production line and/ or operator
- (4) Electrification of the product from electrostatic induction
- (5) Excessive mechanical shock

#### 14.5. Transportation

Murata recommends that when transporting this product, it be packed so as to avoid damage by mechanical vibration or exposure to adverse conditions such as ocean air, high humidity. It is additionally recommended that appropriate instructions and guidelines be communicated to carriers to prevent exposure to these same conditions.

#### 15. Note

1. Murata recommends that customers ensure that the evaluation and testing of these devices are completed with this product actually assembled on their product.
2. All the items and parameters in this product specification have been prescribed on the premise that Murata's product is used for the purpose, under the condition and in the environment mutually agreed upon.

**This document is for reference only and subject to revision without prior of subsequent notice.  
Please contact Murata for latest documentation.**

#### Note:

1. This datasheet is downloaded from the website of Murata Manufacturing co., ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.