


**PROPRIETARY DATA**

This document may not be reproduced, disclosed, or otherwise used, in whole or in part, without the written permission of SIRENZA MICRODEVICES



REVISION HISTORY


REV	DESCRIPTION	ECD	APPR	DATE
A	INITIAL RELEASE	1884	RIVAS	11/13/02

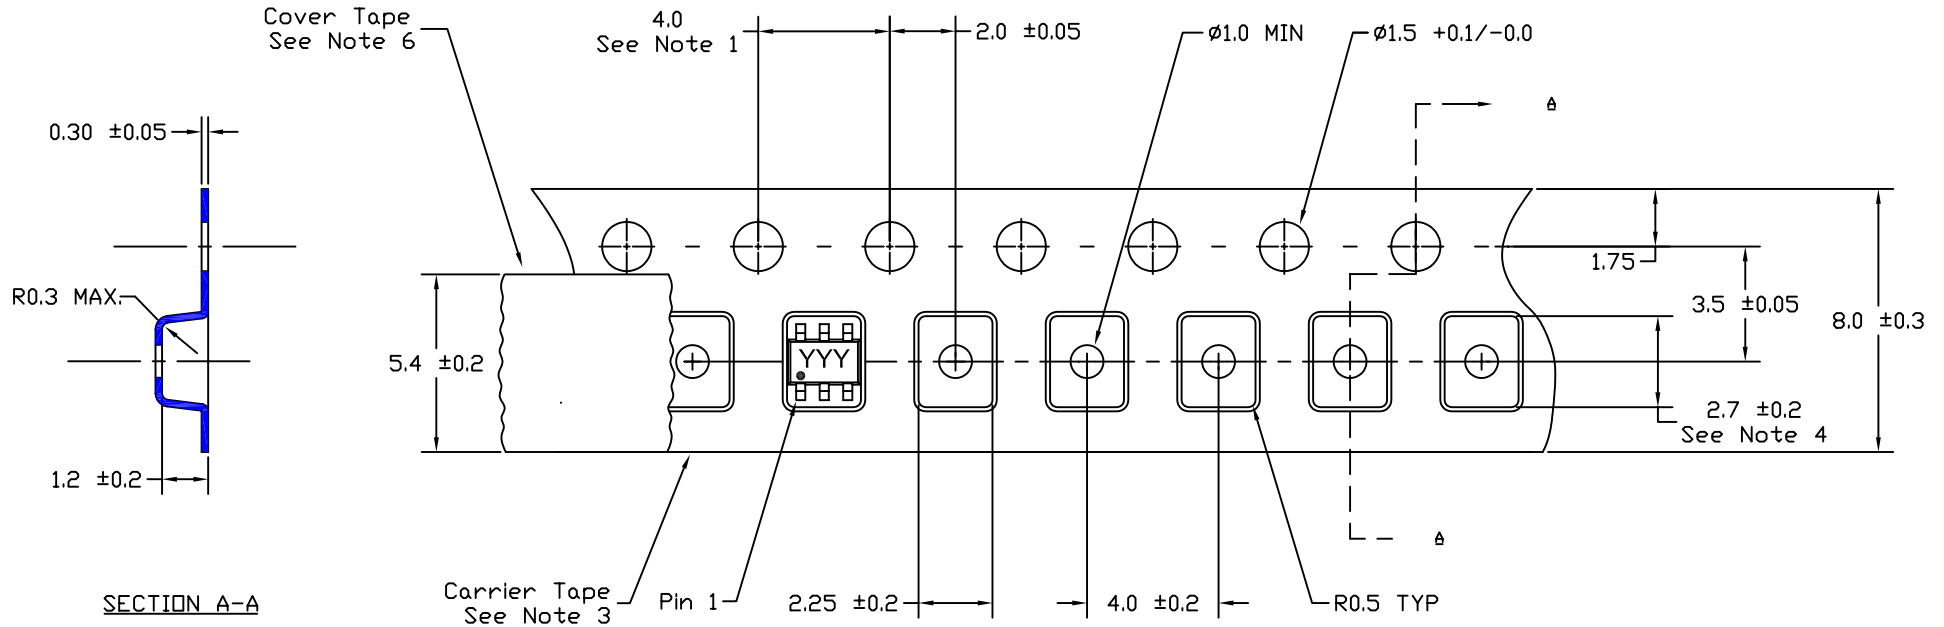

**GENERAL NOTES**

- 10 sprocket hole pitch cumulative tolerance
- Camber not to exceed 1mm in 100mm
- Material: Black Conductive Polystyrene
- Measured on a plane 0.3mm above the bottom of the pocket.
- Measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
- Material: Antistatic Polyester Film

THIRD ANGLE PROJECTION



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM [INCHES] PER ANSI Y14.5M-1982.

TOLERANCES ARE:  
DECIMAL ANGLE  
.XX ± 0.01 [0.25] ± 1/2°  
.XXX ± 0.005 [0.127]

MATERIAL(S):  
---

FINISH:  
---

NEXT ASSY: \_\_\_\_\_  
WHERE USED

MODEL: \_\_\_\_\_

SCALE:

DO NOT SCALE DRAWING

SIGNATURE \_\_\_\_\_ DATE \_\_\_\_\_

DRG \_\_\_\_\_

CHK \_\_\_\_\_

TRB \_\_\_\_\_

Dwg Template:

DDC-102671 (A)



DWG TITLE: Component Tape & reel Packaging

SOT-63

SIZE DWG NO. **MP0-102769** REV **A**

SHEET 1 OF 1