


PROPRIETARY DATA
 This document may not be reproduced, disclosed, or otherwise used, in whole or in part, without the written permission of SIRENZA MICRODEVICES




REVISION HISTORY				
REV	DESCRIPTION	ECD	APPR	DATE
A	INITIAL RELEASE		Barcome	6/20/05

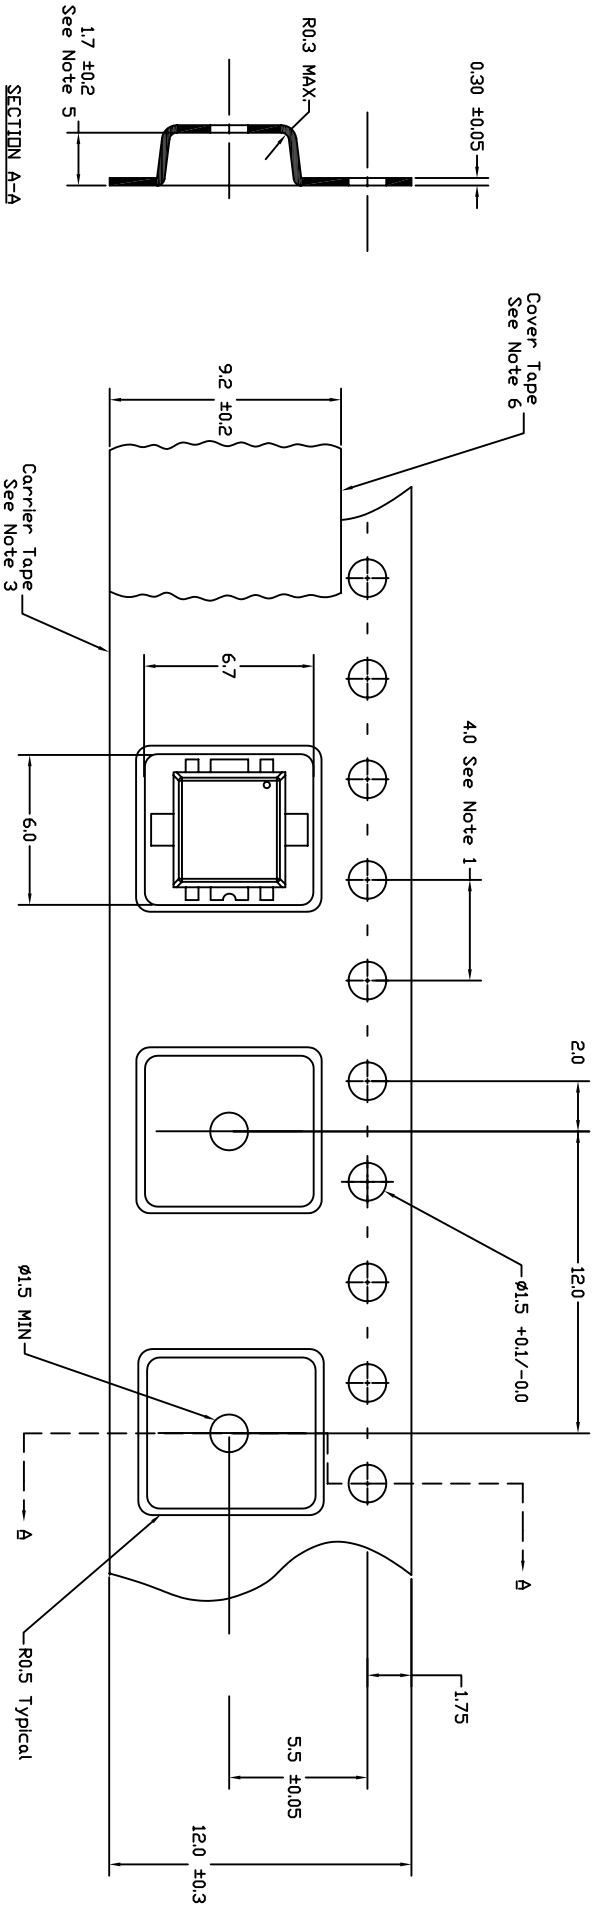

GENERAL NOTES

1. 10 sprocket hole pitch cumulative tolerance
2. Camber not to exceed 1mm in 100mm
3. Material: Black Conductive Polystyrene
4. Measured on a plane 0.3mm above the bottom of the pocket.
5. Measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
6. Material: Antistatic Polyester Film



FINISH	XXX4.009[0.127]
WHERE USED	
MODEL	
NEXT ASSY	

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS PER ANSI Y14.5M-1982. TOLERANCES ARE:
 DECIMAL .XX ±0.1[0.25] ±1/2°
 ANGLES ±1/2°
 MATERIAL(S) ---

SCALE: DO NOT SCALE DRAWING

SIGNATURE	DATE
Dwg Translated	
DPC-106871 (A)	

SIRENZA

DWG TITLE: SDF26 Tape and Reel

SIZE: B
 DWG NO: MPD-104787

REV: A

SHEET 1 OF 1

4

3

2

1