


■ High Temperature Loading DC


● High Temperature Loading-1

Test Condition: 2.1V@70°C

Capacitance

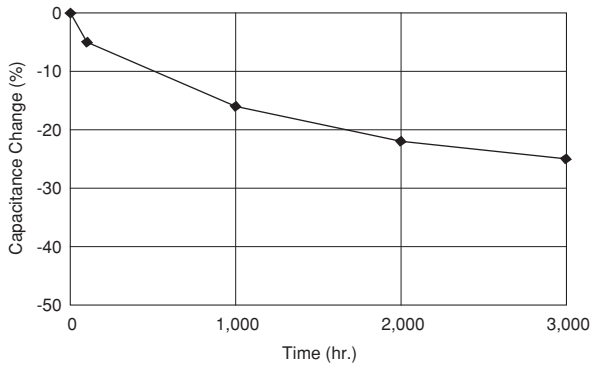


ESR

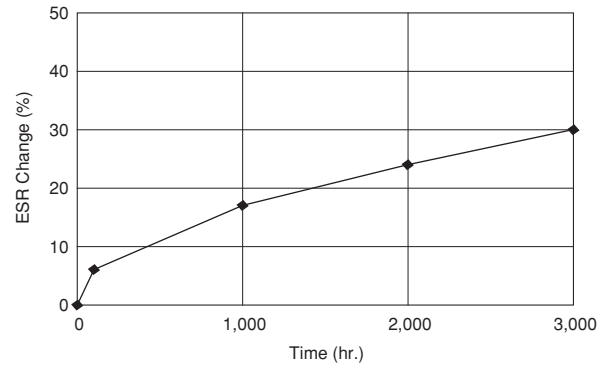


● High Temperature Loading-2

Test Condition: 2.75V@70°C

Capacitance

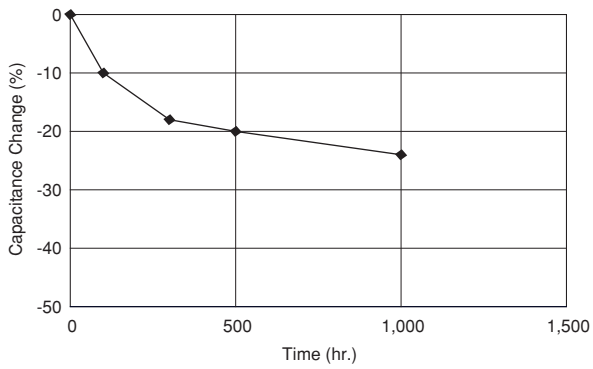


ESR

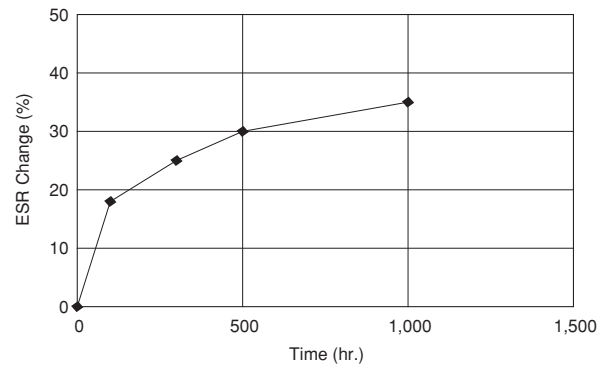

■ Charge-Discharge Cycle (@40°C)

Capacitance

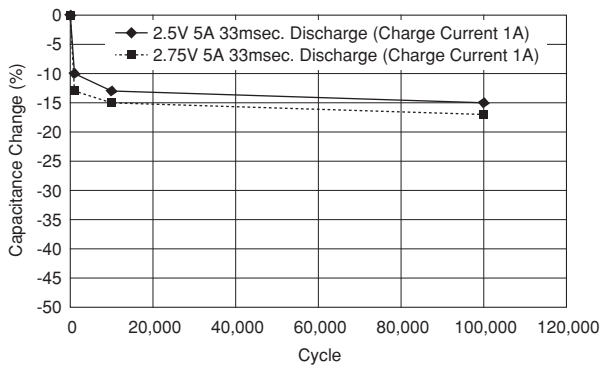

ESR

