


# MICRO2™ BLADE FUSE 32V

RoHS

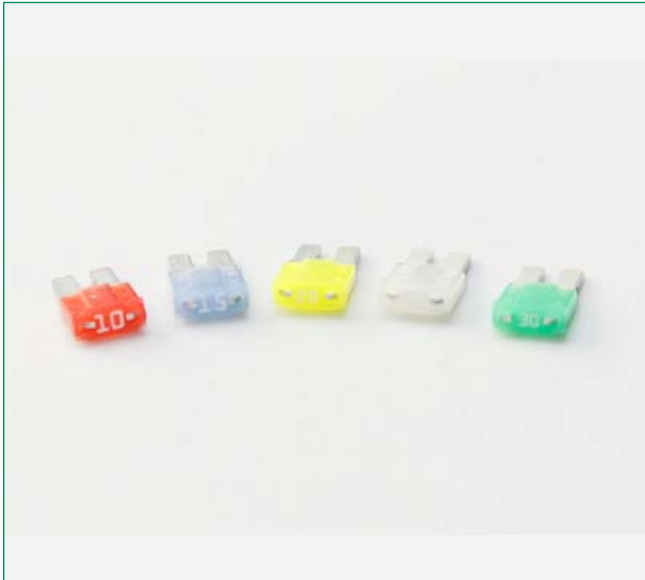

## Specifications


Voltage Rating:	32 VDC
Interrupting Ratings:	1000A @ 32 VDC
Operating Temperature Range:	-40°C to +125°C

## Ordering Information

Part Number	Package Size
NA	NA
NA	NA

## Dimensions

Dimensions in mm

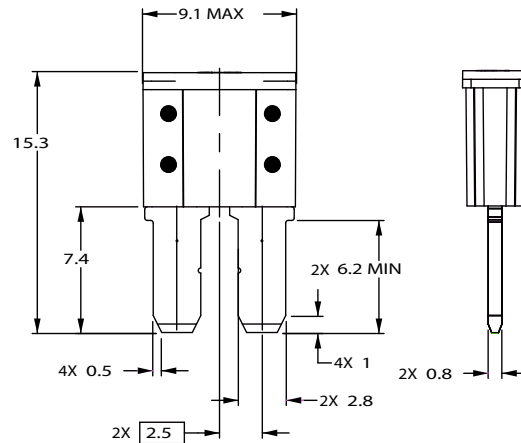

## Description

The MICRO2™ Fuse is the new standard for vehicle circuit protection. Its sub-miniature design meets the need for more circuits to be protected while utilizing less space and its ability to cope with high temperatures in adverse environments makes the MICRO2™ Fuse the recommended choice for protection.

## Time-Current Characteristics

% of Rating	Opening Time Min / Max (s)
110	100 h / -
135	0.75 s / 120 s
160	0.30 / 50 s
200	0.15 s / 5 s
350	0.080 s / 0.50 s
600	0.030 s / 0.100 s


## Ratings

Part Number	Current Rating	Housing Color	Typ. Voltage Drop	Cold Resistance	I <sup>2</sup> t
0327005	5		175	17.41	17
032707.5	7.5		150	10.83	47
0327010	10		140	7.73	89
0327015	15		125	4.81	189
0327020	20		125	3.43	397
0327025	25		125	2.64	585
0327030	30		120	2.13	1028

# MICRO2™ BLADE FUSE 32V

RoHS

## Time-Current Characteristic Curves

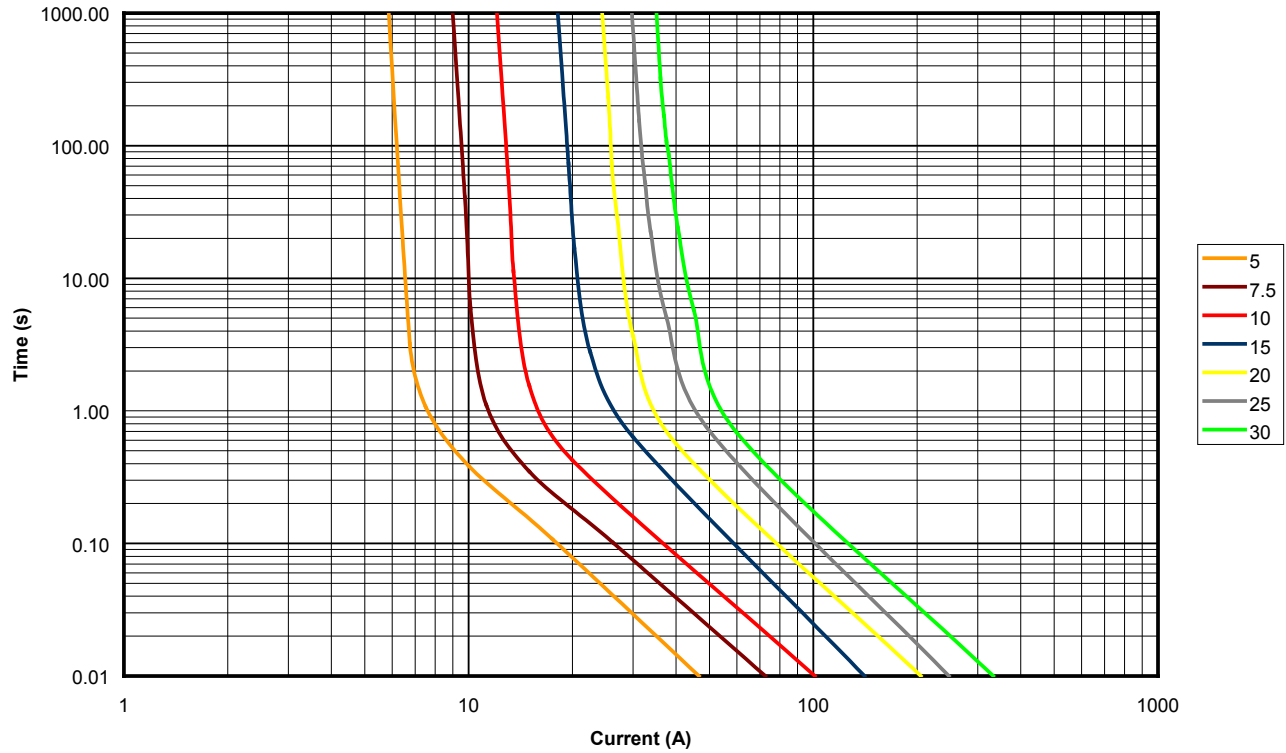

## Temperature Rerating Curve

