

Features

- Compatible with HDMI 1.3c
- Supports 2.25 Gbps Signaling Rate for 480i/p, 720i/p, and 1080i/p Resolutions up to 12-Bit Color Depth
- Integrated Receiver Termination
- Integrated Receiver Equalization to Accommodate to Different Input Cable Lengths
- Intra-Pair Skew < 40 ps
- Inter-Pair Skew < 65 ps
- **System Level ESD Protection Exceeds 8 kV (direct contact) for TMDS Inputs and DDC Interface**
- Supply Voltage, VCC= 3.3 V +/- 5%
- 5-V Tolerance on All Side Band Signals
- 64-pin LQFP Package
- **Green Part** and 260 °C reflow rated

Applications

- Digital TV
- Digital projector
- Digital Monitor
- Audio video receiver

Description


The AZHW351R is a 3-port High-Definition Multimedia Interface (HDMI) or DVI switch which allows up to 3 HDMI or DVI ports to be switched to a single display terminal. Four TMDS channels, one hot plug detector, and a digital display control (DDC) interface are supported on each port. Each TMDS channel allows signaling rates up to 2.25 Gbps to allow 1080p resolution in 12-bit color depth. With two control pins, all input terminations can be disconnected, TMDS inputs are high impedance with standard TMDS terminations, all internal devices are turned off to disable the DDC links, and all HPD outputs are connected to the HPD_SINK. This allows the

initiation of the HDMI physics address discovery process.


Termination resistor (50Ω), pulled up to VCC, are integrated at each TMDS receiver input. External terminations are not required.

The AZHW351R provides one level of input equalization for different ranges of cable lengths. Each TMDS receiver owns frequency responsive equalization circuits. The pin EQ has to be set at logic low, the receiver supports the input connection in long range HDMI cables. The AZHW351R supports a power saving operation. When a system is under power down mode and there is no digital audio/visual content from a connected source to minimize power consumption from TMDS inputs, outputs, and internal circuits. The device is characterized for operation from 0 °C to 70 °C.


Typical application

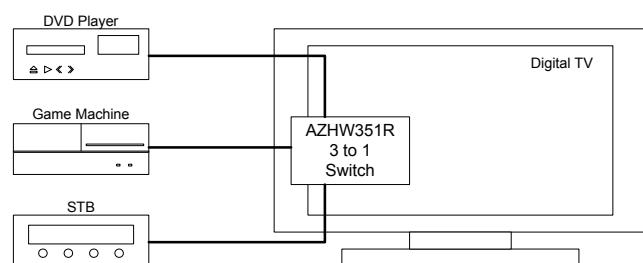

Circuit diagram

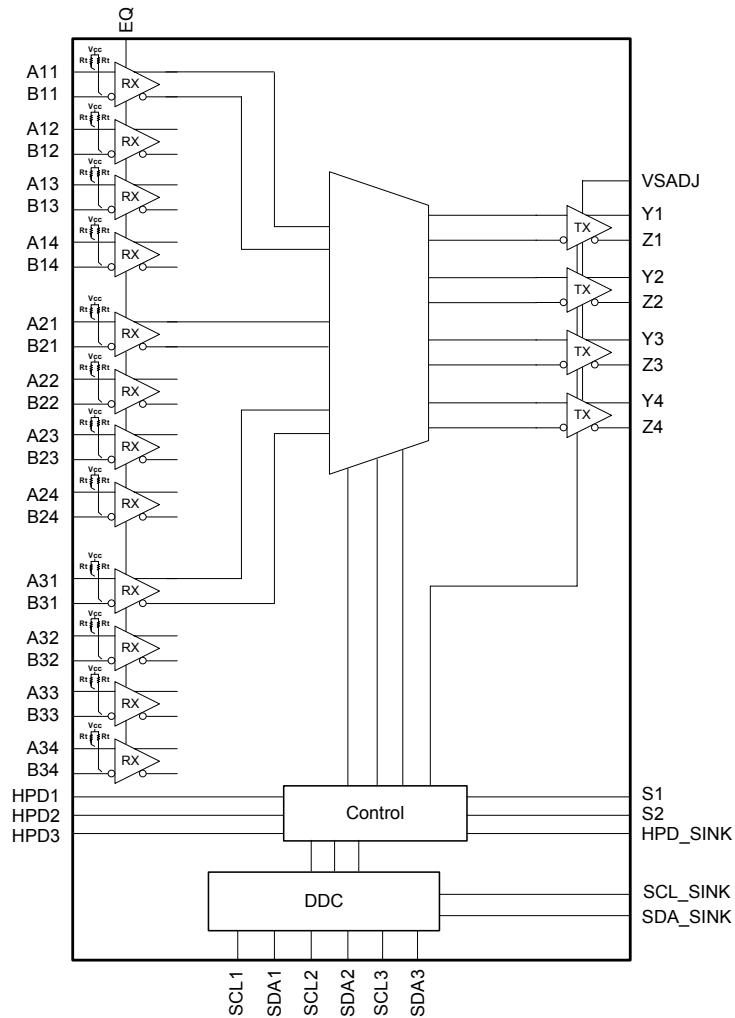

Pin Configuration

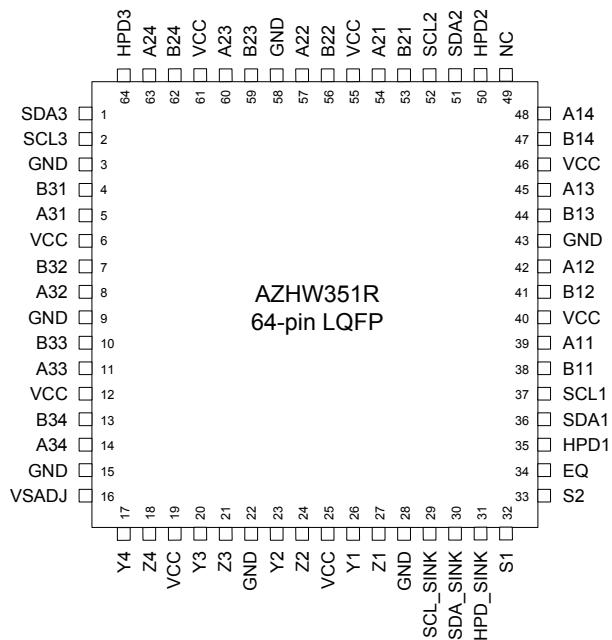

TERMINAL FUNCTIONS

TERMINAL		I/O	Description
NAME	NO.		
A11, A12, A13, A14	39, 42, 45, 48	I	Source port 1 TMDS positive inputs
A21, A22, A23, A24	54, 57, 60, 63	I	Source port 2 TMDS positive inputs
A31, A32, A33, A34	5, 8, 11, 14	I	Source port 3 TMDS positive inputs
B11, B12, B13, B14	38, 41, 44, 47	I	Source port 1 TMDS negative inputs
B21, B22, B23, B24	53, 56, 59, 62	I	Source port 2 TMDS negative inputs
B31, B32, B33, B34	4, 7, 10, 13	I	Source port 3 TMDS negative inputs
GND	3, 9, 15, 22, 28, 43, 58	---	Ground
EQ	34	I	TMDS input equalization selector EQ= low---10m 28 AWG HDMI cable
HPD1	35	O	Source port 1 hot plug detector output
HPD2	50	O	Source port 2 hot plug detector output
HPD3	64	O	Source port 3 hot plug detector output
HPD_SINK	31	I	Sink port hot plug detector input
SCL1	37	I/O	Source port 1 DDC I ² C clock line
SCL2	52	I/O	Source port 2 DDC I ² C clock line
SCL3	2	I/O	Source port 3 DDC I ² C clock line
SCL_SINK	29	I/O	Sink port DDC I ² C clock line
SDA1	36	I/O	Source port 1 DDC I ² C data line
SDA2	51	I/O	Source port 2 DDC I ² C data line
SDA3	1	I/O	Source port 3 DDC I ² C data line
SDA_SINK	30	I/O	Sink port DDC I ² C data line
S1, S2	32, 33	I	Source selector
VCC	6, 12, 19, 25, 40, 46, 55, 61	---	Power supply
VSADJ	16	I	TMDS compliant voltage swing control
Y1, Y2, Y3, Y4	26, 23, 20, 17	O	Sink port TMDS positive outputs
Z1, Z2, Z3, Z4	27, 24, 21, 18	O	Sink port TMDS negative outputs

Table-1: Source Selection Lookup

Operatio n Model	CONTROL PINS		I/O SELECTED		HOT PLUG DETECT STATUS		
	S1	S2	Y/Z	SCL_sink SDA_sink	HPD1	HPD2	HPD3
Normal Operation	H	H	A1/B1 Terminations of A2/B2 and A3/B3 are disconnected	SCL1 SDA1	HPD_SINK	L	L
	L	H	A2/B2 Terminations of A1/B1 and A3/B3 are disconnected	SCL2 SDA2	L	HPD_SINK	L
	L	L	A3/B3 Terminations of A1/B1 and A2/B2 are disconnected	SCL3 SDA3	L	L	HPD_SINK
Power Down	H	L	All terminations are disconnected	Are pulled High by external pull-up termination	HPD_SINK	HPD_SINK	HPD_SINK

Note. H: logic high; L: logic low;

ABSOLUTE MAXIMUM RATINGS

			UNIT
Supply voltage range	VCC		-0.5V to 4V
Voltage range	Anm, Bnm		2.5V to 4V
	Ym, Zm, VSADJ, EQ		-0.5V to 4V
	SCLn, SCL_SINK, SDAn, SDA_SINK, HPDn, HPD_SINK, S1, S2		-0.5V to 6V
Electrostatic discharge	System level (direct contact) (1)	Anm, Bnm, SCLn, SDAn, HPDn,	+/- 8 KV
	Human body model (2)	Anm, Bnm, SCLn, SDAn, HPDn	+/- 8 KV
		All pins	+/- 4 KV
	Machine model (2)	All pins	+/- 200V
	Charged-device model (2)	All pins	+/- 1000V

*(1) System level: tested in accordance with IEC61000-4-2

*(2) Tested in accordance with JEDEC Standard 22

RECOMMENDED OPERATING CONDITIONS

	MIN	NOM	MAX	UNIT
VCC Supply voltage	3.135	3.3	3.465	V
T _A Operating free-air temperature	0	25	70	°C
TMDS differential pins				
V _{IC} Input common mode voltage	VCC-0.4		VCC+0.01	V
V _{ID} Receiver peak-to-peak differential input voltage	150		1560	mV _{P-P}
R _{VSADJ} Resistor for TMDS compliant voltage swing range		6.2k		Ω
AV _{CC} TMDS output termination voltage		3.3		V
R _T Termination resistance	45	50	55	Ω
Signaling rate	0		2.25	Gbps
Control pins (EQ)				
V _{IH} LVTTL High-level input voltage	2		Vcc	V
V _{IL} LVTTL Low-level input voltage	GND		0.8	V
DDC I/O pins				
V _{I(DDC)} DDC input voltage	GND		5.5	V
Status and source selector pins (S1, S2, HPD_SINK)				
V _{IH} LVTTL High-level input voltage	2.5		5.5	V
V _{IL} LVTTL Low-level input voltage	GND		0.8	V

Electrical Characteristics

Over recommended operating conditions (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP (1)	MAX	UNIT
I _{CC} Supply current	R _T = 50 Ω V _{CC} = 3.3V AV _{CC} = 3.3V Data pattern = 2.25 Gbps Clock = 225 MHz	S1/S2= L/L L/H H/H	225		mA
		S1/S2= H/L	6	14	mA

TMDS DIFFERENTIAL PINS (A/B; Y/Z)

V _{OH} Single-ended high-level output Voltage	R _T = 50 Ω	AV _{CC} -10	AV _{CC}	AV _{CC} +10	mV
V _{OL} Single-ended low-level output voltage	V _{CC} = 3.3V AV _{CC} = 3.3V	AV _{CC} -700	AV _{CC} -560	AV _{CC} -400	mV
V _{swing} Single-ended output swing voltage		400	560	700	mV
I _(os) Short circuit output current			11.5	14	mA
R _{INT} Input termination resistance	V _{IN} = 2.9 V	45	50	55	Ω

Electrical Characteristics (continued)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
DDC I/O PINS					
C _{IO} Input/output Capacitance	V _{I(PP)} = 1V, 100 kHz		6	18	pF
R _{ON} Switch resistance	I _O = 3 mA, V _O = 0.4 V		80	150	Ω
V _{PASS} Switch output voltage	V _I = 3.3V, I _O =100 μA	1.5	2.0	2.5	V
STATUS AND SOURCE SELECTOR PINS					
V _{IH} TTL High-level input voltage		2.5		5.5	V
V _{IL} TTL Low-level input voltage		GND		0.8	V


- (1) All typical values are at 25 °C and with a 3.3-V VCC supply.

SWITCHING CHARACTERISTICS

Over recommended operating conditions (unless otherwise noted)

PARAMETER	TEST CONDITIONS	MIN	TYP ₍₁₎	MAX	UNIT
TMDS DIFFERENTIAL PINS (Y/Z)					
t_{PLH} Propagation delay time, low-to-high-level output	$R_T = 50 \Omega$ $AV_{CC} = 3.3V$ Am/Bm (1) = 225 MHz clock $AV_{CC} = 3.3V$ Am/Bm (2:4) = 2.25 Gbps pattern		1200	1500	ps
t_{PHL} Propagation delay time, high-to-low-level output			1200	1500	ps
t_r Differential output signal rise time		75	140	240	ps
t_f Differential output signal fall time		75	140	240	ps
$t_{sk(p)}$ Pulse skew ($t_{PHL}-t_{PLH}$)			10	50	ps
$t_{sk(D)}$ Intra-pair differential skew			20	40	ps
$t_{sk(0)}$ Inter-pair differential skew			18	65	ps
$t_{jt(PP)}$ Peak-to-peak output jitter(Y1/Z1)			40	50	ps
$t_{jt(PP)}$ Peak-to-peak output jitter (Y2/Z2; Y3/Z3; Y4/Z4)			75	120	ps
t_{sx} Select to switch output			25	60	ns

*(1) All typical values are at 25°C and with a 3.3-V VCC supply.

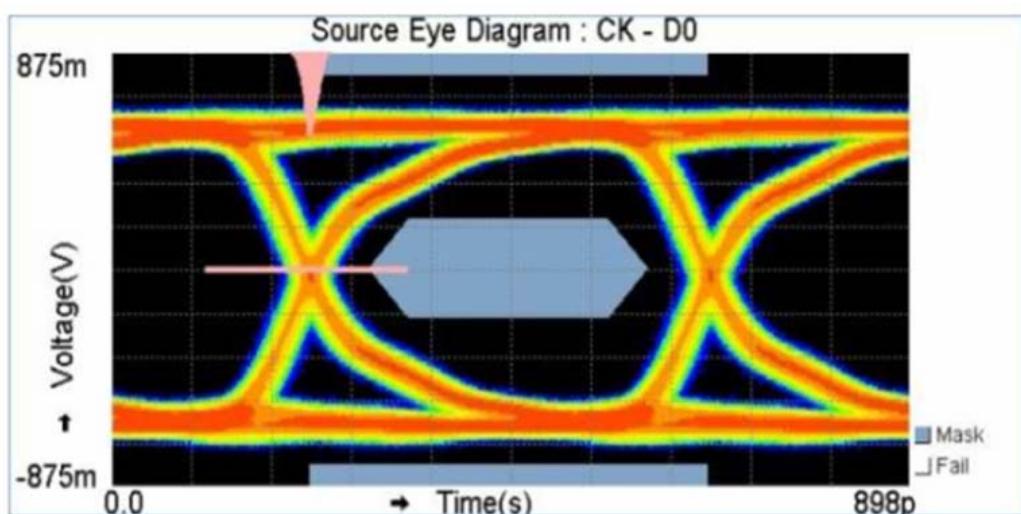


Eye diagram of the differential output at $T_a = 25^\circ C$, $AV_{CC}=3.3 V$, $VCC=3.3 V$, differential swing at the input = 1000 mV, data rate = 2.25 Gbps,

Mechanical Details

64-pin LQFP

PACKAGE DIAGRAMS


TOP VIEW

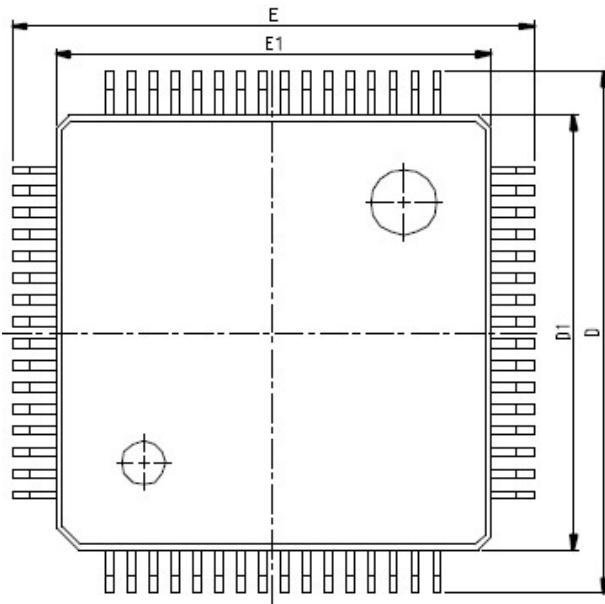

SYMBOL	DIMENSION IN MM			DIMENSION IN INCH		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A			1.60			0.063
A1	0.05		0.15	0.002		0.006
A2	1.35	1.40	1.45	0.053	0.055	0.057
b	0.17	0.20	0.23	0.007	0.008	0.009
c	0.09		0.16	0.004		0.006
e	0.50 BASIC			0.020 BASIC		
D	12.00 BASIC			0.472 BASIC		
D1	10.00 BASIC			0.394 BASIC		
E	12.00 BASIC			0.472 BASIC		
E1	10.00 BASIC			0.394 BASIC		
L	0.45	0.60	0.75	0.018	0.024	0.030
L1	1.00 REF.			0.039 REF.		
R1	0.08			0.003		
R	0.08		0.20	0.003		0.008
θ	0	3.5	7	0	3.5	7
θ1	0			0		
θ2	11	12	13	11	12	13
θ3	11	12	13	11	12	13
JEDEC	MS-026 (BCD)					

NOTES : DIMENSIONS " D1 " AND " E1 " DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.25 mm PER SIDE.
" D1 " AND " E1 " ARE MAXIMUM PLASTIC BODY SIZE DIMENSIONS INCLUDING MOLD MISMATCH.

SIDE VIEW

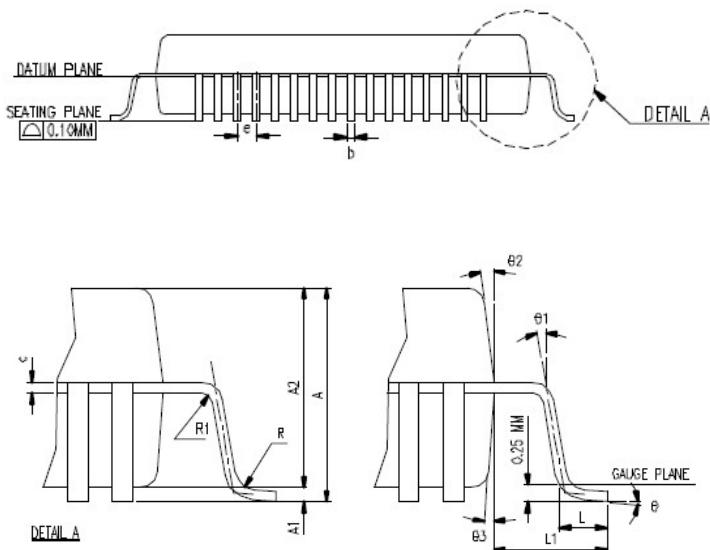

Marking Code

Part Number	Marking Code
AZHW351R	AZHW351R

Revision History

Revision	Modification Description
Revision 2009/05/22	Formal version initial release.