


LPSM QUICK CONNECT POWR-SAFE FUSEHOLDERS



Description

The LPSM midget fuseholder series is a dead front design providing protection to personnel when installing and removing fuses. The compact fuseholder mounts quickly onto 35 mm DIN rail, decreasing panel layout and assembly time. This product has two Quick Connect terminals on both the top and bottom of the holder, offering an additional connection option. It is available in 1-, 2-, 3- and 4-pole configurations.

Dimensions in mm [inches]

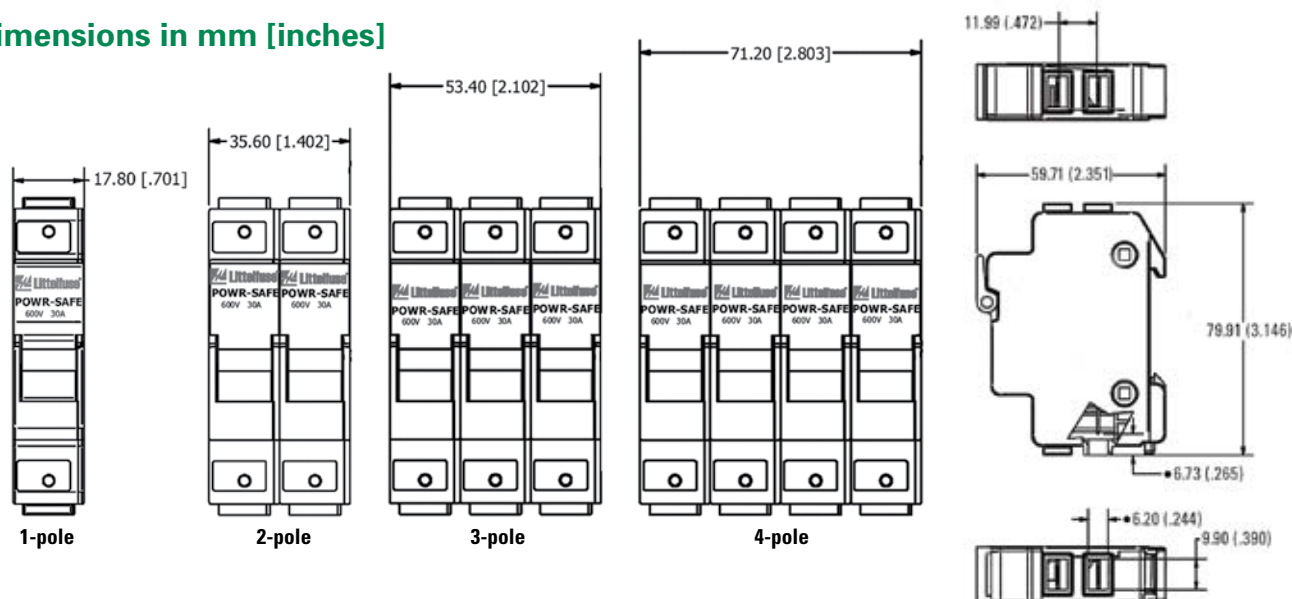

Recommended Fuses

Midget-Style

Web Resources

Sample requests, downloadable CAD drawings and other technical information: www.littelfuse.com/lpsmqc

Features/Benefits

- Dual 1/4" Quick Connect Terminals on Top and Bottom of Holder
- Meets Dead Front requirements
- Mountable on 35 mm DIN Rail
- Local LED Indication

Specifications

Voltage Rating:	600 VAC/DC
Amperage Rating:	30 A
Approval:	UL Recognized (File No. E14721), CSA Certified (File No. LR7316), CCC Approved
Terminal Type:	1/4" Quick Connect Terminals
Fuse Type:	Midget (10 X 38 mm) series
Material:	Thermoplastic
Flammability Rating:	UL94 V-0
SCCR Rating:	Same as Fuse Rating
Indication:	Indicating Fuseholder (LED)

Ordering Information

POLES	CATALOG NUMBER	SYSTEM NUMBER
1	LPSM001QCID	LPSM0001ZQCID
2	LPSM002QCID	LPSM0002ZQCID
3	LPSM003QCID	LPSM0003ZQCID
4	LPSM004QCID	LPSM0004ZQCID

Multi-pole Assembly Kit

Assembly kit is designed for use with LPSC/LPSM fuse holders. Kit contains 20 connector pincers and 10 handle pins.

Part No: CYHP001

